


# K-Y-WINKELVERSCH DER IG AG-K

Male branch Y-elbows, swivel type, parallel female thread and conical male thread, coated

**HANSA FLEX**

## Īpašības

<b>Darba spiediens</b>	Max. 15 bar, coarse vacuum
<b>Izmantošana</b>	Air, vacuum
<b>Ieteicamās šļūtenes</b>	PU or PA (nylon)
<b>Darba vides</b>	Compressed air and all gases or liquids that are compatible with the materials
<b>Temperatūras diapazons</b>	-20 °C to +80 °C
<b>Blīvēšanas virsma</b>	Conical version: thread coating
<b>Materiāls</b>	Plastic, Nickel plated brass
<b>Piespiedējgredzens</b>	Plastic

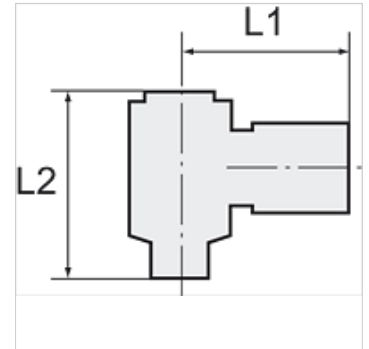

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Izstrādājums

Apzīmējums	Vītne	šļūtenes ārējam Ø	L1 (mm)	L2 (mm)	SW
K- 07 40 43 23	G/R 1/8	6 mm	24,0	30,5	14 mm
K- 07 40 43 22	G/R 1/4	8 mm	28,5	36,0	17 mm
K- 07 40 43 24	G/R 3/8	10 mm	33,7	42,3	21 mm
K- 07 40 43 21	G/R 1/2	12 mm	37,5	51,0	24 mm