


# K-WV 5/2 BEIDS ELEKTRO

5/2-way spool valves, double solenoid

**HANSA FLEX**

## Īpašības

<b>Funkcija</b>	5/2-way
<b>Eksploatācijas spiediens</b>	2.5 - 10 bar; Max. vacuum 10 bar (external pilot air)
<b>min. darba spiediens</b>	2,5 bar
<b>Temperatūras diapazons</b>	-10 °C to +60 °C
<b>Caurplūde 6 bar un 10 bar</b>	1500 NI/min (G 1/4), 4600 NI/min (G 1/2)
<b>Elektriskais pieslēgums</b>	Coupler plug PG 9 - form B
<b>Aizsardzības veids</b>	IP 65 (DIN 46244)
<b>Korpuss</b>	Anodised aluminium, blue
<b>Virzļveida plūsmdaļis</b>	Stainless steel
<b>Bīvēšanas materiāls</b>	NBR

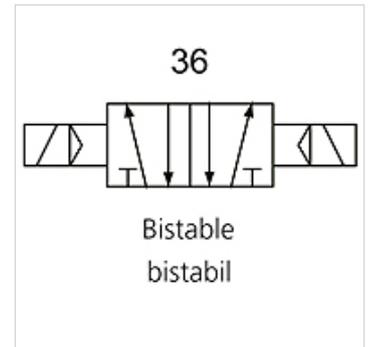

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

This valve design, featuring the Tapered Tee Seal®, offers the ability to run without lubrication and supports almost any compressed air quality. The valves are largely resistant to dirt and can thus also be used under extreme conditions without any problems. Leakage is now a thing of the past and the spool no longer sticks, even after long idle periods.

## Izstrādājums

Apzīmējums	Savienojums	Spriegums	DN	Slēguma shēmas numurs	Vadība
K- 07 15 02 25	G 1/4	24 V DC	8	36	
K- 07 15 02 26	G 1/2"	24 V DC	15	36	
K- 07 15 02 27	G 1/4	230 V AC, 50 Hz	8	36	
K- 07 15 02 28	G 1/2"	230 V AC, 50 Hz	15	36	