


K-DICHTRING PVC

Captive seals, PVC, max. temperature 70 °C

HANSA FLEX

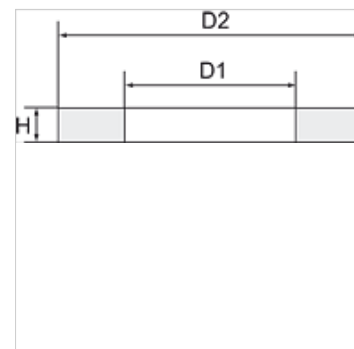

Norāde

Citi dati pieejami pēc pieprasījuma.

Pasūtījuma norādes

All seals are only sold in packaging units of 100 x. Tolerances refer to data sheets.

Izstrādājums

| Apzīmējums | vītnei | D1 (mm) | D2 (mm) | H (mm) |
|----------------|--------|------------|------------|-----------|
| K- 07 10 03 23 | M 5 | 5,0 | 8,0 | 1,2 |
| K- 07 10 03 27 | G 1/2 | 21,0 | 25,4 | 2,0 |
| K- 07 10 03 25 | G 1/4 | 13,1 | 17,9 | 1,8 |
| K- 07 10 03 26 | G 3/8 | 16,8 | 21,4 | 1,8 |
| K- 07 10 03 29 | G 1 | 33,4 | 40,0 | 2,0 |
| K- 07 10 03 28 | G 3/4 | 26,6 | 32,0 | 2,0 |
| K- 07 10 03 24 | G 1/8 | 9,9 | 13,9 | 1,8 |