


# K-STECKVERBINDU ABSP

Stop unions

**HANSA FLEX**

## Īpašības

<b>Darba spiediens</b>	Max. 10 bar, vacuum
<b>Izmantošana</b>	Air, vacuum
<b>Ieteicamās šļūtenes</b>	PU or PA (nylon)
<b>Darba vides</b>	Saspiests gaiss
<b>Temperatūras diapazons</b>	0 °C to +60 °C
<b>Bīvēšanas virsma</b>	O-ring (NBR)
<b>Materiāls</b>	Plastic, Nickel plated brass
<b>Piespiedējgredzens</b>	Plastic

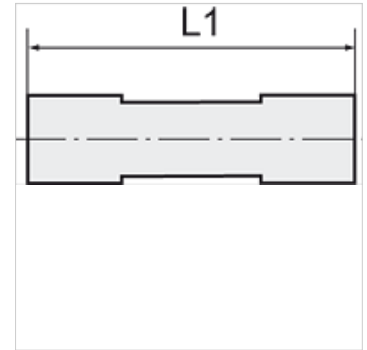

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

The air supply is completely shut off as soon as the hose is disconnected from the union. The flow rate is only guaranteed if the hose is securely inserted.

## Izstrādājums

Apzīmējums	šļūtenes ārējam Ø	L1 (mm)
K- 07 40 08 59	4 mm	47,0
K- 07 40 08 60	6 mm	45,0
K- 07 40 08 61	8 mm	49,5
K- 07 40 08 62	10 mm	63,0
K- 07 40 08 63	12 mm	66,5