


K-WTEH SERIE ONE O DRS

Service units, »ONE« Series, without pressure switch

HANSA FLEX

Īpašības

| | |
|-------------------------------|-----------------------------------|
| ļeejas spiediens | Max. 10 bar |
| Temperatūras diapazons | -10 °C to +50 °C |
| Darba vides | Saspiests gaiss |
| Aizsardzības veids | IP 65 |
| Darba spiediens | 0.5 - 8 bar |
| Spiediena slēdzis | Changeover contact |
| Poru attālums filtra elementā | 20 µm |
| Caurplūdes vērtības mērījums | At 6,3 bar and $\Delta p = 1$ bar |

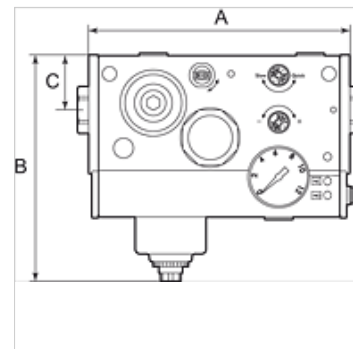

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Multifunctional service unit with 6 or 7 functions in a single device: 3/2-way valve (manually operated), filter with automatic drain valve, air ports, pressure regulator, pressure gauge, soft start valve and optional: pressure switch. This combination of extremely good flow rates and a wide range of functions integrated in a single, compact unit saves valuable space and is unmatched by any similar product available in the market! Soft starting independently of the load and easy replacement of the filter cartridge under pressure are just two of the other outstanding features of this amazing device.

Pasūtījuma norādes

This unit can also be supplied with many other combinations of functions and port sizes. We will be pleased to make you an offer to match your individual specification on request!

Izstrādājums

| Apzīmējums | Savienojums | Caurplūde (L/min) | A (mm) | B | C (mm) | Spriegums |
|----------------|-------------|-------------------|--------|----------|--------|--|
| K- 07 25 13 79 | G 1/4 | 2400 | 165,5 | 144,0 mm | 35,0 | 24 V DC (for valves and pressure switch) |
| K- 07 25 13 80 | G 3/8 | 3300 | 165,5 | 144,0 mm | 35,0 | 24 V DC (for valves and pressure switch) |
| K- 07 25 13 81 | G 1/2" | 4000 | 165,5 | 144,0 mm | 35,0 | 24 V DC (for valves and pressure switch) |