
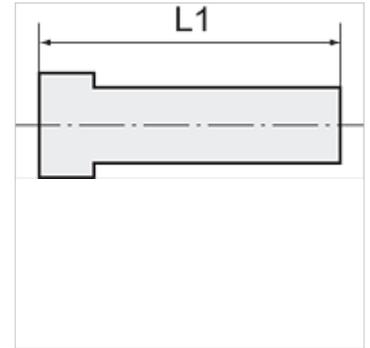


K-VSTO POM

Plugs

Īpašības

| | |
|-----------------------------|---|
| Darba spiediens | 0 - 16 bar (4 - 8 mm); 0 - 10 bar (10 - 28 mm) |
| Eksploataācijas temperatūra | -20 °C to +70 °C in air; +1 °C to +70 °C in water |
| Materiāls | Acetalpolymerisat (POM) |
| Blīvēšanas materiāls | NBR |



Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Izstrādājums

| Apzīmējums | Krāsa | L1 (mm) | Īscaurule (mm) |
|----------------|---------|------------|-------------------|
| K- 07 40 29 11 | sarkans | 28,0 | 4 |
| K- 07 40 29 12 | sarkans | 28,0 | 5 |
| K- 07 40 29 13 | sarkans | 30,0 | 6 |
| K- 07 40 29 14 | sarkans | 31,0 | 8 |
| K- 07 40 29 15 | sarkans | 36,5 | 10 |
| K- 07 40 29 16 | sarkans | 38,5 | 12 |
| K- 07 40 29 17 | melns | 45,0 | 15 |
| K- 07 40 29 18 | melns | 41,5 | 18 |
| K- 07 40 29 19 | melns | 45,0 | 22 |
| K- 07 40 29 20 | melns | 56,0 | 28 |