
K-RD STUECKE PP

Reducers

Īpašības

Darba spiediens	on request
Ekspluatācijas temperatūra	Max. +20 °C
Materiāls	Polypropylene (PP)
Blīvēšanas materiāls	NBR



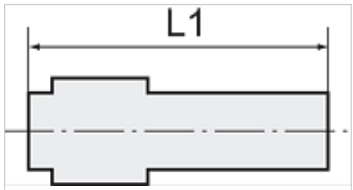

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Lightweight, push-in fittings distinguished by high strength, toughness, resistance to abrasion and impact resistance - ideal for a wide range of applications. Plastic and metal tubes are connected together quickly and easily. Suitable for compressed air or liquids, with good resistance to a large number of chemicals.

Izstrādājums

Apzīmējums	šļūtenes ārējam Ø	L1 (mm)	Īscaurule (mm)
K- 07 40 29 00	22 mm	127,0	32
K- 07 40 29 01	28 mm	133,3	32

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.