
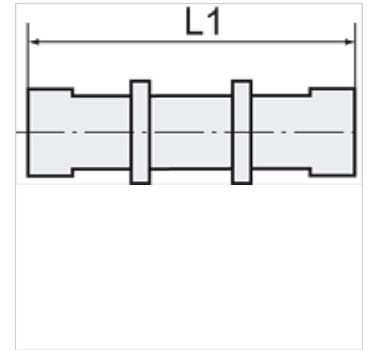


# K-SCHOTT-STECKVERB ABSP

Female bulkhead stop unions (pressure max. 10 bar)

## Īpašības

<b>Darba spiediens</b>	Max. 10 bar, vacuum
<b>Izmantošana</b>	Air, vacuum
<b>Ieteicamās šļūtenes</b>	PU or PA (nylon)
<b>Darba vides</b>	Saspiests gaiss
<b>Standarts</b>	M thread acc. to DIN 13-1, with O-Ring
<b>Temperatūras diapazons</b>	0 °C to +60 °C
<b>Materiāls</b>	Plastic, Nickel plated brass
<b>Piespiedējgredzens</b>	Plastic



## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

The air supply is completely shut off as soon as the hose is disconnected from the union. <br>The flow rate is only guaranteed if the hose is securely inserted.

## Izstrādājums

Apzīmējums	Vītnes	šļūtenes ārējam Ø	L1 (mm)	SW
K- 07 40 43 74	M 12 x 1,5	4 mm	41,0	14 mm
K- 07 40 43 75	M 14 x 1,5	6 mm	44,5	17 mm
K- 07 40 43 76	M 16 x 1,5	8 mm	50,3	19 mm
K- 07 40 43 77	M 20 x 1,5	10 mm	58,5	24 mm
K- 07 40 43 78	M 24 x 1,5	12 mm	62,2	27 mm