



K-ODER-VENTIL

OR valves

HANSA FLEX

Īpašības

Ekspluatācijas spiediens	2 - 10 bar
Temperatūras diapazons	-10 °C to +80 °C
Caurplūde pie 6,3 bar un Δ 1 bar	500 NI/min (G 1/8), 1300 NI/min (G 1/4)
Vārsta korpuss	Alumīnijs
Lode	Stainless steel
Blīvējumi	NBR

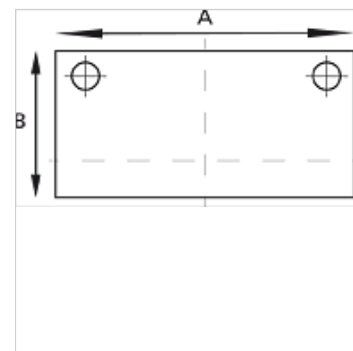

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

The valve has two inlets and one outlet. A signal appears at the outlet when the left or right inlet is pressurised.
If the pressure at the two inlets is different, the stronger of the two signals appears at the outlet.

Izstrādājums

Apzīmējums	Vītnes	A (mm)	B (mm)
K- 07 15 26 05	3 x G 1/8	36,0	20,0
K- 07 15 26 04	3 x G 1/4	43,0	25,0