

K-SCHOTT-STECKVERB 3

Female bulkhead connectors

Īpašības

Darba spiediens	Max. 15 bar, coarse vacuum
Izmantošana	Air, vacuum
ieteicamās šļūtenes	PU or PA (nylon)
Darba vides	Compressed air and all gases or liquids that are compatible with the materials
Temperatūras diapazons	-20 °C to +80 °C
Materiāls	Plastic, Nickel plated brass
Piespiedējgredzens	Plastic



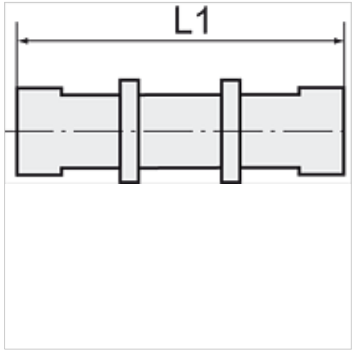

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Izstrādājums

Apzīmējums	šļūtenes ārējam Ø	Sadales dēļa vītne	L1 (mm)	SW
K- 07 40 04 31	4 mm	M 12 x 1	31,1	14 mm
K- 07 40 04 32	6 mm	M 14 x 1	33,4	17 mm
K- 07 40 04 33	8 mm	M 16 x 1	37,7	19 mm
K- 07 40 04 34	10 mm	M 20 x 1	41,8	24 mm
K- 07 40 04 35	12 mm	M 22 x 1	46,7	27 mm
K- 07 40 04 36	16 mm	M 27 x 1	51,2	32 mm

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.