


# K-SCHOTT-STECK MINI

Bulkhead connectors, mini

**HANSA FLEX**

## Īpašības

<b>Darba spiediens</b>	Max. 10 bar, vacuum
<b>Izmantošana</b>	Air, vacuum
<b>ieteicamās šļūtenes</b>	PU or PA (nylon)
<b>Darba vides</b>	Saspiests gaiss
<b>Standarts</b>	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
<b>Temperatūras diapazons</b>	0 °C to +60 °C
<b>Materiāls</b>	Plastic, Nickel plated brass
<b>Piespiedējgredzens</b>	Plastic

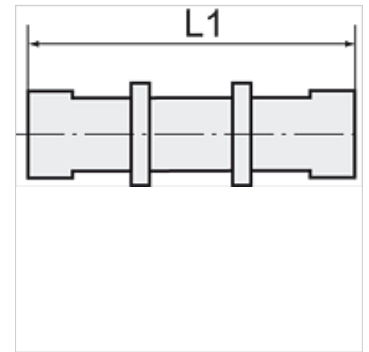

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

## Izstrādājums

Apzīmējums	Vītnes	šļūtenes ārējam Ø	L1 (mm)	SW
K- 07 40 50 12	M 8 x 0.75	3 mm	20,3	10 mm
K- 07 40 50 10	M 10 x 1.0	4 mm	24,0	12 mm
K- 07 40 50 11	M 12 x 1.0	6 mm	23,8	14 mm