


# K-FI AK KOH PC-BEHAEL SI VARIOBLOC

Activated carbon filters with polycarbonate bowl and bowl guard

**HANSA FLEX**

## Īpašības

|                                     |  |
|-------------------------------------|--|
| <b>Ieejas spiediens</b>             | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| <b>Vielas temperatūra</b>           | max. 50 °C   |
| <b>Vides temperatūra</b>            | Max. 50 °C (polycarbonate bowl), Max. 80 °C (metal bowl)   |
| <b>Gaisa kvalitāte ISO 85731</b>    | Class 1 dirt, class 1 oil                                  |
| <b>Atlikusī eļļa</b>                | 0,003 mg/m <sup>3</sup>                                    |
| <b>Caurplūdes vērtības mērījums</b> | At P1 = 7 bar and pressure drop $\Delta p = 0,1$ bar       |

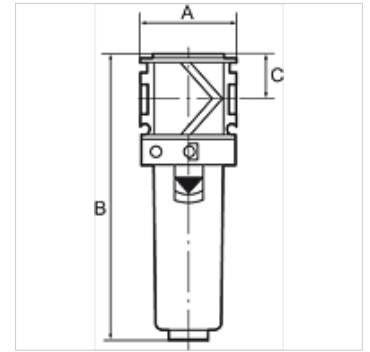

## Norāde

Activated carbon filters are also supplied with protective cage or metal container.

Citi dati pieejami pēc pieprasījuma.

## Apraksts

The activated carbon filter absorbs oil vapour from the compressed air. The entering compressed air needs to be dry and free of contaminants (an upstream microfilter is strongly recommended).

## Izstrādājums

| Apzīmējums     | Vītnes | Caurplūde (L/min) | A (mm) | B (mm)   | C (mm) |
|----------------|--------|-------------------|--------|----------|--------|
| K- 07 25 23 12 | G 1/4  | 800               | 48,0   | 142,0 mm | 22,0   |
| K- 07 25 23 13 | G 3/8  | 1000              | 48,0   | 142,0 mm | 22,0   |
| K- 07 25 23 14 | G 1/2  | 1200              | 70,0   | 193,0 mm | 26,0   |
| K- 07 25 23 15 | G 3/4  | 1300              | 70,0   | 193,0 mm | 26,0   |
| K- 07 25 23 16 | G 1    | 1300              | 124,0  | 193,0 mm | 26,0   |