
K-T-STECK VB 3

Union tees

Īpašības

Darba spiediens	Max. 16 bar
Ekspluatācijas temperatūra	-20 °C to +80 °C
Materiāls	Niķelēts misiņš
Piespiedējgredzens	Hostaform
Iespīlēšanas gredzens	Stainless steel



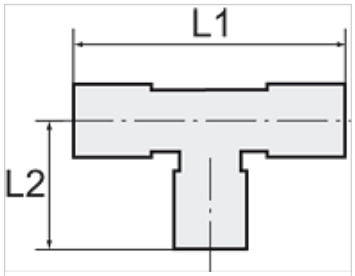

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Izstrādājums

Apzīmējums	šļūtenes ārējam Ø	L1 (mm)	L2 (mm)
K- 07 40 25 42	3 mm	21,2	10,4
K- 07 40 25 43	4 mm	33,4	16,7
K- 07 40 25 44	5 mm	38,4	19,2
K- 07 40 25 45	6 mm	38,0	19,0
K- 07 40 25 46	8 mm	42,6	21,3
K- 07 40 25 47	10 mm	46,6	23,3
K- 07 40 25 48	12 mm	52,0	26,0
K- 07 40 25 49	14 mm	58,6	29,3

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.