

K-L-STECKVER AG-K

Male elbows, conical male thread

Īpašības

Darba spiediens	Max. 16 bar
Ekspluatācijas temperatūra	-20 °C to +80 °C
Materiāls	Niķelēts misiņš
Piespiedējgredzens	Hostaform
Iespīlēšanas gredzens	Stainless steel



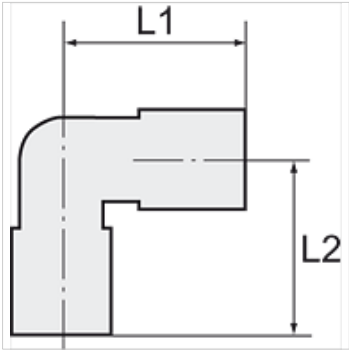

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

Izstrādājums

Apzīmējums	Vītnes	šļūtenes ārējam Ø	L1 (mm)	L2 (mm)	SW
K- 07 40 25 65	R 1/8	4 mm	18,6	16,0	10 mm
K- 07 40 25 66	R 1/8	6 mm	21,9	16,0	10 mm
K- 07 40 25 67	R 1/8	8 mm	25,4	16,0	10 mm
K- 07 40 25 63	R 1/4	6 mm	21,9	18,5	10 mm
K- 07 40 25 64	R 1/4	8 mm	25,4	18,5	10 mm
K- 07 40 25 62	R 1/4	10 mm	27,2	22,0	14 mm

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.