# K-L-RINGSTUECK1

L-ring nipples

## Īpašības

| | |
|---|---|
| **Darba spiediens** | Max. 16 bar |
| **Ekspluatācijas temperatūra** | -20 °C to +70°C |
| **Materiāls** | Niķelēts misiņš |
| **Piespiedējgredzens** | Hostaform |
| **Iespīlēšanas gredzens** | Stainless steel |



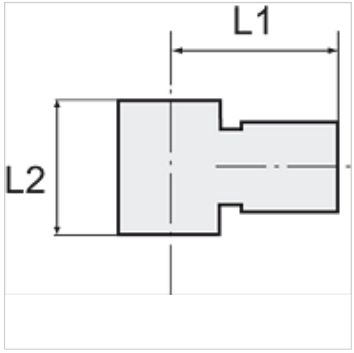


## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

The advanced version of our highly successful push-in fittings series manufactured in nickel-plated brass. Advantages of this new, optimised series: Much easier connection and disconnection of the hose, even with repeated mounting, can also be used for non-calibrated hoses, suitable for vacuum operation.

## Izstrādājums

| Apzīmējums | dobskrūvei | šļūtenes ārējam Ø | L1 (mm) | L2 (mm) |
|---|---|---|---|---|
| **K- 07 40 26 82** | M 5 | 4 mm | 18,0 | 9,0 |
| **K- 07 40 26 87** | G 1/8 | 4 mm | 20,5 | 15,0 |
| **K- 07 40 26 88** | G 1/8 | 6 mm | 23,0 | 15,0 |
| **K- 07 40 26 89** | G 1/8 | 8 mm | 24,5 | 15,0 |
| **K- 07 40 26 85** | G 1/4 | 6 mm | 24,0 | 17,0 |
| **K- 07 40 26 86** | G 1/4 | 8 mm | 26,0 | 17,0 |
| **K- 07 40 26 83** | G 1/4 | 10 mm | 27,0 | 17,0 |
| **K- 07 40 26 84** | G 1/4 | 12 mm | 28,0 | 17,0 |
| **K- 07 40 26 92** | G 3/8 | 8 mm | 27,0 | 20,0 |
| **K- 07 40 26 90** | G 3/8 | 10 mm | 28,0 | 20,0 |
| **K- 07 40 26 91** | G 3/8 | 12 mm | 29,0 | 20,0 |

*Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.*