
K-T-STECK VB 1

Union tees

Īpašības

Darba spiediens	Max. 16 bar
Ekspluatācijas temperatūra	-20 °C to +150 °C
Materiāls	Niķelēts misiņš
Piespiedējgredzens	Nickel-plated brass
Iespīlēšanas gredzens	Stainless steel



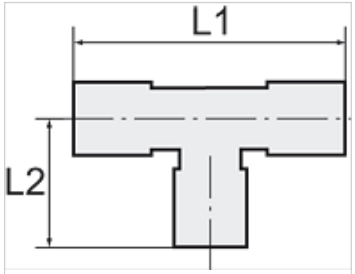

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Izstrādājums

Apzīmējums	šļūtenes ārējam Ø	L1 (mm)	L2 (mm)
K- 07 40 27 57	4 mm	34,0	17,0
K- 07 40 27 58	6 mm	39,0	19,5
K- 07 40 27 59	8 mm	46,0	23,0
K- 07 40 27 60	10 mm	50,0	25,0
K- 07 40 47 81	12 mm	54,0	27,0
K- 07 40 47 82	14 mm	62,0	31,0

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.