


K-X-STECKVERBINDUNG

X-unions

HANSA FLEX

Īpašības

| | |
|-------------------------------|--|
| Darba spiediens | Max. 15 bar, coarse vacuum |
| Izmantošana | Air, vacuum |
| Ieteicamās šļūtenes | PU or PA (nylon) |
| Darba vides | Compressed air and all gases or liquids that are compatible with the materials |
| Temperatūras diapazons | -20 °C to +80 °C |
| Materiāls | Plastic, Nickel plated brass |
| Piespiedējgredzens | Plastic |

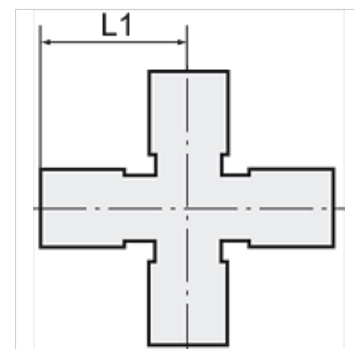

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

Izstrādājums

| Apzīmējums | šļūtenes ārējam Ø | L1 (mm) |
|----------------|-------------------|------------|
| K- 07 40 03 70 | 4 mm | 17,5 |
| K- 07 40 03 71 | 6 mm | 19,0 |
| K- 07 40 03 72 | 8 mm | 22,8 |
| K- 07 40 03 73 | 10 mm | 27,9 |
| K- 07 40 03 74 | 12 mm | 29,3 |