


# K-L-STECKVER SK DREH AG-K

Banjo elbows with outer hex, swivel type, conical male thread, coated

**HANSA FLEX**

## Īpašības

|                        |                                                                                |
|------------------------|--------------------------------------------------------------------------------|
| Darba spiediens        | Max. 15 bar, coarse vacuum                                                     |
| Izmantošana            | Air, vacuum                                                                    |
| Ieteicamās šļūtenes    | PU or PA (nylon)                                                               |
| Darba vides            | Compressed air and all gases or liquids that are compatible with the materials |
| Temperatūras diapazons | -20 °C to +80 °C                                                               |
| Blīvēšanas virsma      | Conical version: thread coating                                                |
| Materiāls              | Plastic, Nickel plated brass                                                   |
| Piespiedējgredzens     | Plastic                                                                        |

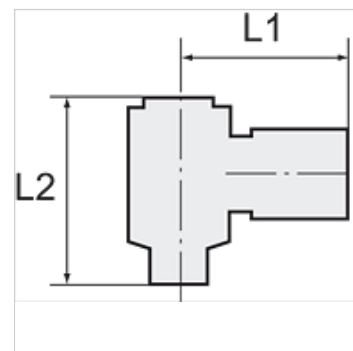

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Push-in fittings series manufactured in plastic and nickel-plated brass. All parts are suitable for use with hoses, tubes or pipes made of plastic and copper.

## Izstrādājums

| Apzīmējums     | Vītnes | šļūtenes ārējais Ø | L1<br>(mm) | L2<br>(mm) | SW    |
|----------------|--------|--------------------|------------|------------|-------|
| K- 07 40 09 52 | R 1/8  | 4 mm               | 22,3       | 23,5       | 10 mm |
| K- 07 40 09 53 | R 1/8  | 6 mm               | 22,9       | 23,5       | 10 mm |
| K- 07 40 09 54 | R 1/8  | 8 mm               | 25,3       | 23,5       | 10 mm |
| K- 07 40 09 50 | R 1/4  | 6 mm               | 24,9       | 26,3       | 14 mm |
| K- 07 40 09 51 | R 1/4  | 8 mm               | 28,4       | 26,3       | 14 mm |
| K- 07 40 09 49 | R 1/4  | 10 mm              | 32,0       | 26,3       | 14 mm |
| K- 07 40 43 51 | R 1/4  | 12 mm              | 33,2       | 26,3       | 14 mm |
| K- 07 40 09 57 | R 3/8  | 6 mm               | 26,6       | 31,9       | 19 mm |
| K- 07 40 09 58 | R 3/8  | 8 mm               | 29,3       | 31,9       | 19 mm |
| K- 07 40 09 55 | R 3/8  | 10 mm              | 32,5       | 31,9       | 19 mm |
| K- 07 40 09 56 | R 3/8  | 12 mm              | 35,3       | 31,9       | 19 mm |
| K- 07 40 09 48 | R 1/2  | 8 mm               | 32,3       | 38,6       | 24 mm |
| K- 07 40 09 46 | R 1/2  | 10 mm              | 35,5       | 38,6       | 24 mm |
| K- 07 40 09 47 | R 1/2  | 12 mm              | 36,3       | 38,6       | 24 mm |