
K-L-STECK VB
Union elbows

Īpašības

Darba spiediens	Max. 16 bar
Ekspluatācijas temperatūra	-20 °C to +150 °C
Materiāls	Niķelēts misiņš
Piespiedējgredzens	Nickel-plated brass
Iespīlēšanas gredzens	Stainless steel



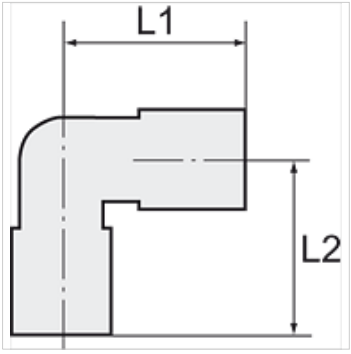

Norāde

Citi dati pieejami pēc pieprasījuma.

Apraksts

Push-in fittings, manufactured entirely in nickel-plated brass. All parts with a parallel thread are supplied with an FPM O-ring.
All parts with conical threads are coated with preCOTE 5 dispersion, all fittings in this series can thus also be used at high temperatures (medium compressed air).

Izstrādājums

Apzīmējums	šļūtenes ārējam Ø	L1 (mm)	L2 (mm)
K- 07 40 27 53	4 mm	17,5	17,5
K- 07 40 27 54	6 mm	20,0	20,0
K- 07 40 27 55	8 mm	23,0	23,0
K- 07 40 27 56	10 mm	25,0	25,0
K- 07 40 47 79	12 mm	27,5	27,5
K- 07 40 47 80	14 mm	31,0	31,0

Neskatoties uz rūpīgu pārbaudi, mēs nevaram izslēgt kļūdas un negarantējam iekļautās informācijas pareizību.