


K-T-VB MS NI

Union tees

HANSA FLEX

Īpašības

Darba spiediens	Max. 18 bar
Bīvēšanas materiāls	Buna-N
Materiāls	Niķelēts misiņš

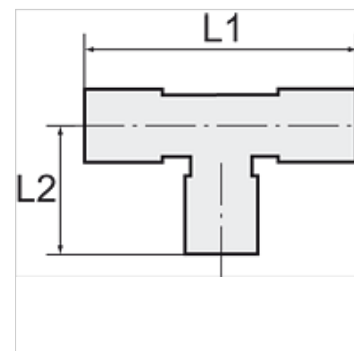

Norāde

Citi dati pieejami pēc pieprasījuma.

Izstrādājums

Apzīmējums	šļūtenei	L1 (mm)	SW
K- 07 40 32 16	4 mm / 2 mm	49,0	9 mm
K- 07 40 32 17	5 mm / 3 mm	43,0	8 mm
K- 07 40 32 18	6 mm / 4 mm	44,0	9 mm
K- 07 40 32 19	8 mm / 6 mm	44,0	10 mm
K- 07 40 32 14	10 mm / 8 mm	50,0	12 mm
K- 07 40 32 15	12 mm / 10 mm	62,0	17 mm