


# K-TL-STECK VERS DRE MINI PAR

Male branch tee, swivel type, mini, parallel thread

**HANSA FLEX**

## Īpašības

<b>Darba spiediens</b>	Max. 10 bar, vacuum
<b>Izmantošana</b>	Air, vacuum
<b>Ieteicamās šļūtenes</b>	PU or PA (nylon)
<b>Darba vides</b>	Saspiests gaiss
<b>Standarts</b>	M thread acc. to DIN 13-1, with O-Ring G thread acc. to DIN EN ISO 228-1, with O-Ring R thread acc. to ISO 7-1, thread coating
<b>Temperatūras diapazons</b>	0 °C to +60 °C
<b>Blīvēšanas virsma</b>	O-ring (NBR)
<b>Materiāls</b>	Plastic, Nickel plated brass
<b>Piespiedējgredzens</b>	Plastic

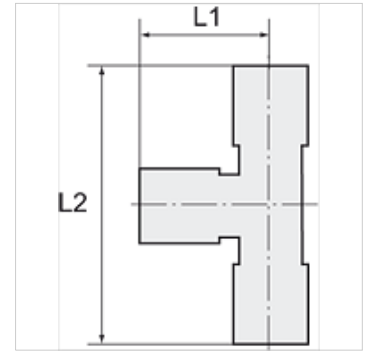

## Norāde

Citi dati pieejami pēc pieprasījuma.

## Apraksts

Push-in fittings series manufactured in plastic and nickel-plated brass, space-saving miniature design.

## Izstrādājums

Apzīmējums	Vītnes	šļūtenes ārējais Ø	L1 (mm)	L2 (mm)	SW
K- 07 40 23 28	M 3	3 mm	12,0	28,0	8 mm
K- 07 40 23 29	M 3	4 mm	14,0	31,2	8 mm
K- 07 40 23 30	M 5	3 mm	12,0	28,0	8 mm
K- 07 40 23 31	M 5	4 mm	14,0	31,2	8 mm
K- 07 40 23 32	M 5	6 mm	14,5	32,7	8 mm
K- 07 40 23 33	M 6	3 mm	12,0	28,5	10 mm
K- 07 40 23 34	M 6	4 mm	14,0	31,6	10 mm
K- 07 40 23 35	M 6	6 mm	14,5	33,1	10 mm
K- 07 40 23 36	G 1/8	4 mm	14,0	30,5	13 mm
K- 07 40 23 37	G 1/8	6 mm	16,0	32,5	13 mm
K- 07 40 23 38	R 1/8	4 mm	14,0	32,0	10 mm
K- 07 40 23 39	R 1/8	6 mm	14,5	33,5	10 mm