
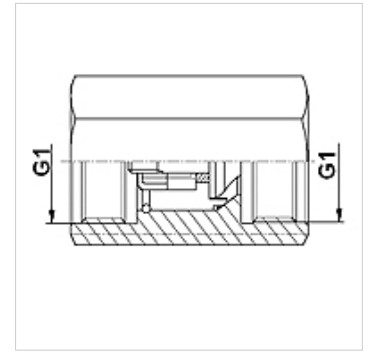


RBS M

Buisbreukbeveiliging M

Eigenschappen

| | |
|-----------|--------------|
| Materiaal | Staal |
| Werkdruk | max. 400 bar |

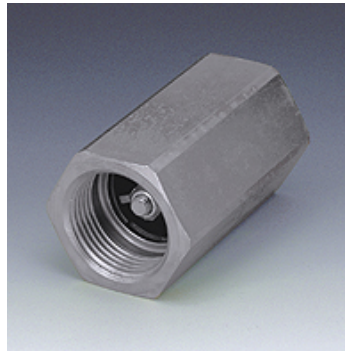

Artikel

| Aanduiding | Werkdruk (bar) | G1 | Sluithoeveelheid (L/min) | Gewicht (kg) |
|-----------------|-------------------|------------|-----------------------------|-----------------|
| RBS 06-20 M 16 | 400,0 | M 16 x 1,5 | 20 | 0,30 |
| RBS 06-40 M 16 | 400,0 | M 16 x 1,5 | 40 | 0,30 |
| RBS 10-63 M 22 | 315,0 | M 22 x 1,5 | 63 | 0,30 |
| RBS 10-90 M 22 | 315,0 | M 22 x 1,5 | 90 | 0,35 |
| RBS 16-200 M 30 | 315,0 | M 30 x 1,5 | 200 | 0,35 |