


# G VKS ST 400

Vierkantflens, Cetop, voorlaskraag

**HANSA FLEX**

## Eigenschappen

|                      |                          |
|----------------------|--------------------------|
| Constructie          | Vierkantflens Cetop      |
| Uitvoering           | recht                    |
| Norm                 | CETOP RP 63H<br>ISO 6164 |
| Materiaal            | S355J2G3 (ST52.3)        |
| Oppervlakbescherming | Zwart geolied            |

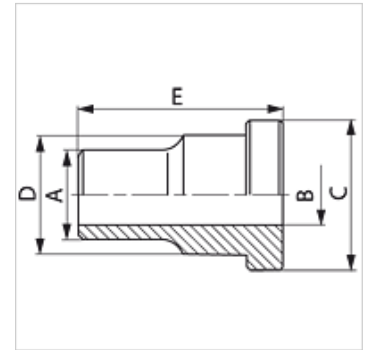

## Artikel

| Aanduiding       | Druk PB<br>(bar) | Maat   | A<br>(mm) | Ø B<br>(mm) | C<br>(mm) | D<br>(mm) | E<br>(mm) |
|------------------|------------------|--------|-----------|-------------|-----------|-----------|-----------|
| G VKS 38 ST 400  | 400              | 3/8"   | 18        | 11,0        | 26,0      | 18        | 35        |
| G VKS 12 ST 400  | 400              | 1/2"   | 22        | 14,0        | 31,8      | 24        | 40        |
| G VKS 34 ST 400  | 400              | 3/4"   | 28        | 18,0        | 39,5      | 32        | 45        |
| G VKS 1 ST 400   | 400              | 1"     | 35        | 22,0        | 47,6      | 38        | 50        |
| G VKS 114 ST 400 | 400              | 1.1/4" | 44        | 29,0        | 54,0      | 44        | 55        |
| G VKS 112 ST 400 | 400              | 1.1/2" | 51        | 35,0        | 63,5      | 51        | 60        |
| G VKS 2 ST 400   | 400              | 2"     | 61        | 43,0        | 79,4      | 67        | 70        |
| G VKS 212 ST 400 | 400              | 2.1/2" | 80        | 53,0        | 94,2      | 60        | 80        |
| G VKS 3 ST 400   | 400              | 3"     | 90        | 58,0        | 104,0     | 90        | 90        |
| G VKS 312 ST 400 | 400              | 3.1/2" | 102       | 63,0        | 119,0     | 102       | 90        |
| G VKS 4 ST 400   | 400              | 4"     | 114       | 74,0        | 131,0     | 114       | 105       |

Serie: LL = zeer licht L = licht S = zwaar - PN = nominale druk PB = max. werkdruk