

PHF 100 VA


Persfitting, TF 100

HANSA FLEX

Eigenschappen

Fittingtype Niet-schilfitting

Materiaal RVS

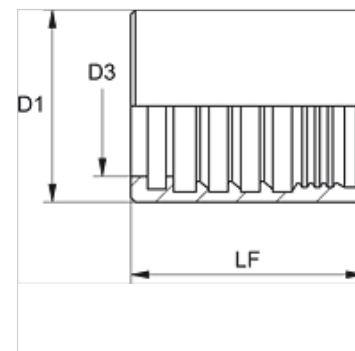

Artikel

| Aanduiding | DN* | Size | Duim | D1 (mm) | D3 (mm) | LF (mm) |
|------------|-----|------|-------|------------|------------|------------|
| PHF 106 VA | 6 | 4 | 1/4" | 14 | 9,2 | 33 |
| PHF 108 VA | 8 | 5 | 5/16" | 17 | 11,2 | 33 |
| PHF 110 VA | 10 | 6 | 3/8" | 19 | 13,5 | 33 |
| PHF 113 VA | 12 | 8 | 1/2" | 23 | 16,1 | 35 |
| PHF 116 VA | 16 | 10 | 5/8" | 27 | 19,8 | 38 |
| PHF 120 VA | 19 | 12 | 3/4" | 30 | 23,8 | 44 |
| PHF 125 VA | 25 | 16 | 1" | 37 | 29,7 | 50 |

DN = nominale diameter, nominale wijdte

Productvarianten

PHF 100 Persfitting, TF 100, Staal