

# PHF 100 VA


Persfitting, TF 100

**HANSA FLEX**

## Eigenschappen

Fittingtype Niet-schilfitting

Materiaal RVS

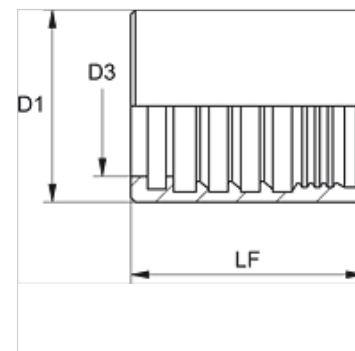

## Artikel

| Aanduiding | DN* | Size | Duim  | D1<br>(mm) | D3<br>(mm) | LF<br>(mm) |
|------------|-----|------|-------|------------|------------|------------|
| PHF 106 VA | 6   | 4    | 1/4"  | 14         | 9,2        | 33         |
| PHF 108 VA | 8   | 5    | 5/16" | 17         | 11,2       | 33         |
| PHF 110 VA | 10  | 6    | 3/8"  | 19         | 13,5       | 33         |
| PHF 113 VA | 12  | 8    | 1/2"  | 23         | 16,1       | 35         |
| PHF 116 VA | 16  | 10   | 5/8"  | 27         | 19,8       | 38         |
| PHF 120 VA | 19  | 12   | 3/4"  | 30         | 23,8       | 44         |
| PHF 125 VA | 25  | 16   | 1"    | 37         | 29,7       | 50         |

DN = nominale diameter, nominale wijdte

## Productvarianten

PHF 100 Persfitting, TF 100, Staal