


# PHN 200 VA

Persfitting voor gevlochten slang

**HANSA FLEX**

## Eigenschappen

|                      |                              |
|----------------------|------------------------------|
| <b>Fittingtype</b>   | Niet-schilfitting            |
| <b>geschikt voor</b> | 2SN (HD 200)<br>3TE (TE 300) |
| <b>Materiaal</b>     | RVS                          |

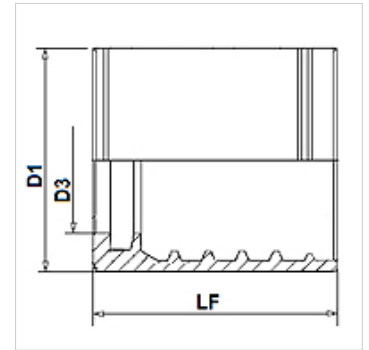

## Aanwijzing

De configuratie van de fitting is afhankelijk van het slangtype.

## Artikel

| Aanduiding | DN* | Size | Duim  | D1<br>(mm) | D3<br>(mm) | LF<br>(mm) |
|------------|-----|------|-------|------------|------------|------------|
| PHN 206 VA | 6   | 4    | 1/4"  | 22,0       | 10,3       | 34,5       |
| PHN 208 VA | 8   | 5    | 5/16" | 24,0       | 12,0       | 34,5       |
| PHN 210 VA | 10  | 6    | 3/8"  | 26,0       | 14,0       | 35,0       |
| PHN 213 VA | 12  | 8    | 1/2"  | 30,0       | 17,2       | 37,0       |
| PHN 216 VA | 16  | 10   | 5/8"  | 33,0       | 20,2       | 40,0       |
| PHN 220 VA | 19  | 12   | 3/4"  | 38,0       | 24,2       | 45,0       |
| PHN 225 VA | 25  | 16   | 1"    | 46,0       | 31,5       | 50,0       |

DN = nominale diameter, nominale wijde