


PHN 100

Persfitting voor gevlochten slang

HANSA FLEX

Eigenschappen

| | |
|----------------------|-------------------|
| Fittingtype | Niet-schilfitting |
| Materiaal | Staal |
| Oppervlakbescherming | Galvanisch gecoat |

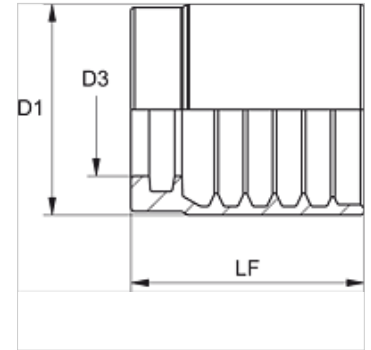

Artikel

| Aanduiding | DN* | Size | Duim | D1 (mm) | D3 (mm) | LF (mm) |
|------------|-----|------|--------|------------|------------|------------|
| PHN 106 | 6 | 4 | 1/4" | 19,6 | 11,4 | 30,2 |
| PHN 108 | 8 | 5 | 5/16" | 20,6 | 12,6 | 30,2 |
| PHN 110 | 10 | 6 | 3/8" | 23,2 | 14,2 | 32,0 |
| PHN 113 | 12 | 8 | 1/2" | 27,5 | 19,0 | 34,0 |
| PHN 116 | 16 | 10 | 5/8" | 31,0 | 22,3 | 37,0 |
| PHN 120 | 19 | 12 | 3/4" | 36,0 | 25,0 | 42,5 |
| PHN 125 | 25 | 16 | 1" | 42,8 | 30,5 | 50,5 |
| PHN 132 | 31 | 20 | 1.1/4" | 51,0 | 37,6 | 59,0 |

DN = nominale diameter, nominale wijde