


Eigenschappen

| | |
|-------------------|------------------|
| Toepassingsgebied | Landbouwmachines |
| Materiaal | staal C40 |

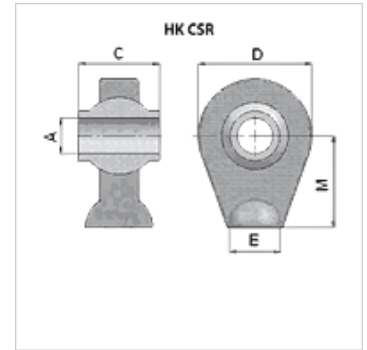

Artikel

| Aanduiding | C (mm) | E | M (mm) | A (mm) | Uitvoering | D (mm) | Gewicht (kg) |
|------------------|-----------|------|-----------|-----------|--------------|-----------|-----------------|
| HK CSR 00 107 08 | 44,0 | Ø 34 | 58,00 | 19,3 | vlak bewerkt | 62 | 0,60 |
| HK CSR 00 107 20 | 44,0 | Ø 34 | 58,00 | 20,2 | vlak bewerkt | 62 | 0,60 |
| HK CSR 00 107 25 | 35,0 | Ø 26 | 50,00 | 22,2 | ruw | 62 | 0,55 |
| HK CSR 00 107 40 | 51,0 | Ø 38 | 65,00 | 25,4 | vlak bewerkt | 75 | 1,10 |
| HK CSR 00 108 10 | 55,0 | Ø 50 | 65,00 | 30,2 | vlak bewerkt | 83 | 1,40 |
| HK CSR 00 108 12 | 35,0 | Ø 50 | 65,00 | 35,2 | vlak bewerkt | 83 | 1,20 |
| HK CSR 00 108 20 | 75,0 | Ø 60 | 85,00 | 40,2 | vlak bewerkt | 108 | 3,35 |
| HK CSR 00 108 40 | 75,0 | Ø 60 | 85,00 | 45,2 | vlak bewerkt | 108 | 3,15 |
| HK CSR 00 108 60 | 75,0 | Ø 60 | 85,00 | 50,2 | vlak bewerkt | 108 | 2,90 |