


Eigenschappen

Uitvoering	om in te schroeven
Temperatuur min.	-30 °C
Temperatuur max.	100 °C
Materiaal	Behuizing: polyamide
Filter material	organisch

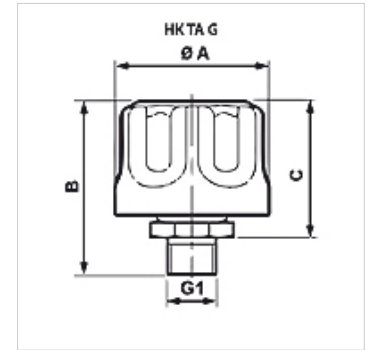

Artikel

Aanduiding	Filterfijnheid (μm)	Luchthoeveelheid (L/min)	B (mm)	C (mm)	G1	Ø A (mm)	Gewicht (kg)
FI BL 046 G P10	10	200	53	40	G 1/4"	46,00	0,13
FI BL 080 G3/4 P	10	120	67	15	G 3/4"	80,00	0,13
FI BL 080 G P03	3	450	71	55	G 3/4"	80,00	0,33
FI BL 080 G P10	10	550	71	55	G 3/4"	80,00	0,33