
K-FLAMM SCHLAUCH
Flame tube

HANSA-FLEX

Eigenschappen

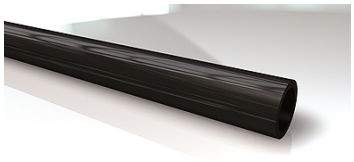

Toepassingsgebied	welding equipment welding robots welding machines Welding Related areas
Kleur	zwart
Temperatuur min.	-40 °C
Temperatuur max.	90 °C

Extra informatie

- Flame retardant according to UL94 V2/V0
- Welding-spark resistant
- Halogen-free according to EN 50267-2-1 (complies with IEC 60754-1)
- LABS free (free from paint-adhesion inhibiting substances)
- UV-resistant
- can be used with drag chains
- flexible
- resistant to bending
- very good wear resitance
- plasticiser free

Artikel

Aanduiding	Inw. Ø (mm)	Buiten-Ø (mm)	Wanddikte (mm)	Buigradius min. (mm)	Max. working pressure resistance at 23°C (bar)	Rollenlengte (m)
K- 07 10 13 27	2,0	4,0	1,0	7	27	50
K- 07 10 13 28	4,0	6,0	1,0	8	20	50
K- 07 10 13 29	4,0	8,0	2,0	9	23	50
K- 07 10 13 30	6,0	10,0	2,0	15	21	50
K- 07 10 13 31	8,0	12,0	2,0	26	18	50
K- 07 10 13 32	10,0	14,0	2,0	38	13	50
K- 07 10 13 33	11,0	16,0	2,5	65	15	50

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.