
K-MANO ABSPV ZAPF DREH MUF 16271B

Pressure gauge shut-off valves, male - loose female and shaft for instrument holder, with test socket M 20 x 1.5, DIN 16271

HANSA-FLEX

Eigenschappen

Werkdruk	max. 250 bar brass, max. 400 bar steel/ stainless steel
Temperatuur	Max. +120 °C with brass/steel; Max. +200 ° C for stainless steel
Materiaal van alle componenten	Stainless steel
Afdichtmateriaal	PTFE
Behuizing	Brass, black-finished steel or stainless steel 1.4571
Handwiel	Plastic
Wartelmoer spanmof	Steel
Ventielspil, ventielkegel	Stainless steel

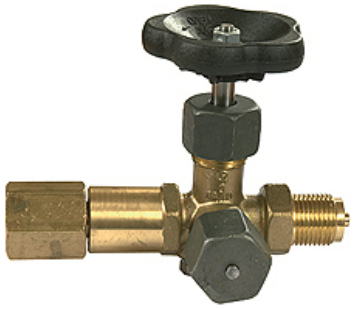

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

They are used as shut-off or reducing elements for pressure gauges when measuring liquids, gases or steam.

Artikel

Aanduiding	Schroefdraad	PN (bar)	SW (mm)	Materiaal
K- 07 20 11 20	G 1/2	250	27	Messing
K- 07 20 11 19	G 1/2	400	27	Stainless steel

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.