
K-SPIR SCHL KUPPL SET

Spiral hose and coupling kits

Eigenschappen

Werkdruk	max. 10 bar (to the temperature +20 °C); max. 7 bar (at temperature +40 °C); max. 5 bar (at temperature +60 ° C)
Koppeling	High quality hand quick release coupling of steel for high flow rates For demanding applications with high mechanical wear
Spiraalslang	Polyurethane

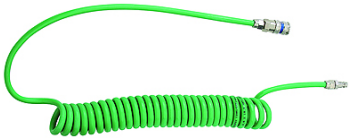

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

For pneumatic applications in challenging industrial environments. High-quality, one-hand quick disconnect coupling made of steel with safety lock to prevent unintentional disconnection. For complex applications susceptible to severe mechanical wear. The outer layer of the hose, which is designed to withstand flying sparks and scorching, has special spark protection. It is therefore ideal for all pneumatic tools used in welding processes.

Artikel

Aanduiding	Slangmaat	Ø spiraal (mm)	Werklengte (m)
K- 07 10 07 56	10 mm x 6,5 mm	52	4,0
K- 07 10 07 57	10 mm x 6,5 mm	52	6,0
K- 07 10 07 58	12 mm x 8 mm	65	8,0

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.