
K-GRUNDEJEKTION SBP

Basic ejectors

Eigenschappen

Eigenschappen	Vacuum generator without control valves or system monitoring functions, with a high maximum vacuum value (85%) No moving parts, which means no wear and no maintenance Maximum suction capacity with minimum compressed air consumption Minimum size, low weight For decentralised vacuum generation in highly dynamic processes
Toepassing	For universal use in lightweight gripper systems to handle air-tight workpieces as well as for automatic separation systems, e.g. in the plastics, electronics and packaging industries. Also ideal for the construction of ejector blocks for decentralised control of suction pads.
Behuizing	Plastic (impact-resistant)
Aansluiting	Push-in coupling
Werkdruk	4.5 bar
Evacuatiegraad	85 %
Geluiddemper	Plastic



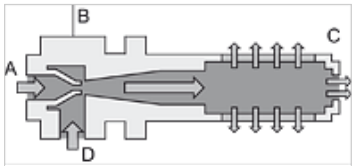

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Artikel

Aanduiding	Spuitmondgrootte	Persluchtaansluiting	Vacuümaansluiting	Luchtverbruik zuigen (L/min)	max. zuigvermogen (L/min)	Afmeting
K- 07 45 01 13	0,5	4 mm	4 mm	14,0	8,0	71mm x 10mm x 28mm
K- 07 45 01 14	0,7	4 mm	4 mm	22,0	16,0	71mm x 10mm x 28mm
K- 07 45 01 15	1,0	6 mm	8 mm	48,0	37,7	97mm x 15mm x 40mm
K- 07 45 01 16	1,5	6 mm	8 mm	105,0	71,0	97mm x 15mm x 40mm
K- 07 45 01 17	2,0	8 mm	10 mm	197,0	127,0	168mm x 20mm x 46mm
K- 07 45 01 18	2,5	8 mm	10 mm	311,0	215,0	168mm x 20mm x 46mm

Toebehoren

K-GRUNDPLATTEN 1	Base plate
K-ERSATZSCHALLDAEMPFER 3	Replacement silencers
K-ERSATZSCHALLDAEMPFER 1	Replacement silencers

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.