

K-INLINE-EJEKTOREN SLP

Inline ejectors »SLP«, plug connection

HANSA FLEX

Eigenschappen



Eigenschappen Vacuum generator with high maximum vacuum level (85% vacuum)
No moving parts, which means no wear and no maintenance
ultra small footprint, suitable for confined spaces
minimal air consumption
low noise

Toepassing by screwing / plugging into the distribution beam
direct attachment to the suction pad
for handling various workpieces

Behuizing plastic (Typ SLP)

Spuitmondensysteem Brass (type VR)

Aansluiting thread connector

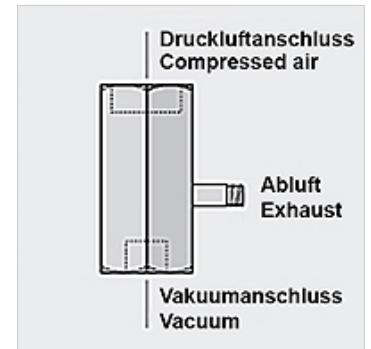

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

For vacuum generation directly at the point of use. For direct installation between the suction pad and the compressed air supply. Purely pneumatic vacuum generator that operates on the Venturi principle. Compressed air enters the ejector and flows through a nozzle. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet. This air and the driving air leave the ejector and enter the atmosphere via the exhaust air outlet.

Artikel

Aanduiding	Spuitmondgrootte	Afzuigaansluiting	Persluchtaansluiting	Vacuümaansluiting	Evacuatiegraad	Luchtverbruik zuigen (L/min)	max. zuigvermogen (L/min)	Lengte (mm)	Werkdruk (bar)
K- 07 45 01 27	0,5	-	4 mm	4 mm	85 %	13,0	8,0	57,0	4,5
K- 07 45 01 28	0,7	-	4 mm	4 mm	85 %	25,0	16,0	57,0	4,5