
K-KOMPAKTEJEKTOREN CP SYST

Compact ejectors »CP«, system monitoring function: digital vacuum switch

Eigenschappen

Eigenschappen	Vacuum generator with integrated control valves and system monitoring functions Gripping and blowing off can be controlled without the need for external valves Optimised air consumption thanks to many models with differing suction capacities Minimum energy costs in continuous operation thanks to automatic air-saving Easy adjustment with foil keypad and LED display of the settings
Toepassing	Handling of air-tight or slightly porous workpieces in fully automated handling systems e.g. in the robotics, automotive, packaging, electronics, electrical engineering and metalworking industries
Basisconstructie	Anodised aluminium
Geïntegreerd	NC blow-off valve, filter, silencer, non-return valve



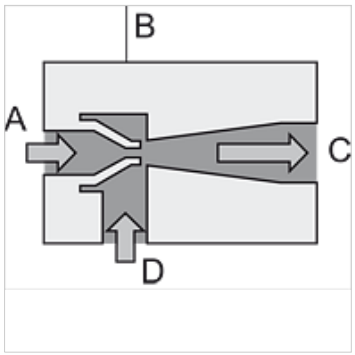

Aanwijzing

Mini-sensor with housing and connection cable, analogue or digital output signal. Minimum size and low weight combined with high measuring accuracy. Andere gegevens op aanvraag.

Beschrijving

Purely pneumatic vacuum ejector that operates on the Venturi principle. Compressed air enters the ejector at A and flows through the nozzle B. This results in a vacuum immediately behind the nozzle outlet, and air is drawn in through the vacuum inlet D. This air and the driving air leave the ejector via the silencer C.

Extra informatie

Important: Order two connection plugs per ejector. A cable set is included with the compact ejector with automatic air-saving.

Artikel

Aanduiding	Spuitmondgr-ootte	Zuigventiel ruststand	Persluchtaansl-uiting	Vacuümaansl-uiting	Luchtverbruik zuigen (L/min)	max. zuigvermogen (L/min)	Afmeting	Werkdr-uk (bar)
K- 07 45 01 35	1,5	NC	G 1/8 IG	G1/8 female	117,0	65,0	72mm x 20mm x 164mm	5,0
K- 07 45 01 36	1,5	NO	G 1/8 IG	G1/8 female	117,0	65,0	72mm x 20mm x 164mm	5,0
K- 07 45 01 39	2,0	NC	G 1/4 IG	G 3/8 female	190,0	116,0	113mm x 22mm x 168mm	6,0
K- 07 45 01 40	2,0	NO	G 1/4 IG	G 3/8 female	190,0	116,0	113mm x 22mm x 168mm	6,0
K- 07 45 01 43	2,5	NC	G 1/4 IG	G 3/8 female	310,0	161,0	113mm x 22mm x 183mm	6,0
K- 07 45 01 44	2,5	NO	G 1/4 IG	G 3/8 female	310,0	161,0	113mm x 22mm x 183mm	6,0

Toebehoren

K-ANSCH KABEL VAKUUMSCHAL	Connection cable for vacuum switch
K-ERSATZSCHALLDAEMPFER 2	Replacement silencers
K-ERSATZFILTERELEMENTE	Replacement filter element

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.