

K-SAUGPLATTENAUFHAENGUNG

Flexible suction pad mountings

Eigenschappen

Toepassing	For handling of workpieces with sloping using large-area vacuum gripper Handling of large plates that can sag when lifting In combination with spring plungers to compensate height-differences and Uneveness
Bijzondere kenmerken	very good adaptation to oblique workpiece surfaces automatic Rückstellung in die Ausgangslage vacuum-tight design with integrated protection against damage

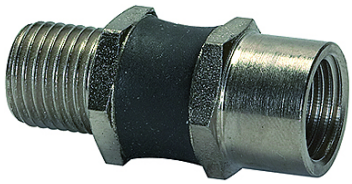

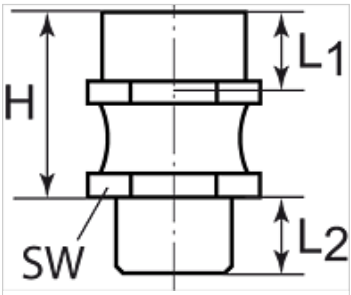

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Flexible suction pad mounting. By flexing in all directions, this mounting allows the suction pad to better adapt itself to sloping workpieces.

Artikel

Aanduiding	Schroefdraad 1 binnen	Schroefdraad 2 buiten	H (mm)	Materiaal	L1 (mm)	L2 (mm)	Hoek W (°)	Verticale belasting (N/m2)	Buigmoment (N/m2)	SW (mm)
K- 07 45 01 47	G 1/4	M 10 x 1.25	27,0	Steel, rubber	10,5	8,0	12	500	8,0	17
K- 07 45 01 48	G 1/4	G 1/4	27,0	Steel, rubber	12,0	12,0	12	750	10,0	17

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.