



K-DRUCKSCHALTER VAKUUM

Combined vacuum/pressure switch

HANSA FLEX

Eigenschappen

Constructie	PNP
Aansluiting meetmedium	G 1/8 male and M 5 female
Hysterese	Adjustable: 3 to 25% of set value
Temperatuurgebied	0 - 50 °C
Middelen	Non-aggressive gases. dry, oil-free air
Behuizing	Polycarbonate
Uitgangssignaal	Analogue: 1 to 5 V
Elektrische aansluiting	Male connector M8, four pin
Schakelvermogen	125 mA
Stroomverbruik	30 mA
Toestandsindicatie	LED

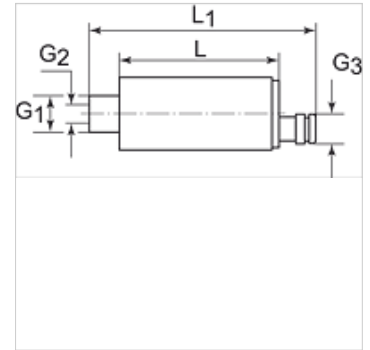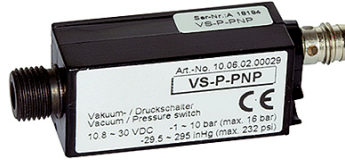

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Universal electronic vacuum and pressure switch for safety monitoring, optimisation of cycle times and regulation circuits. Its small size and low weight permit installation directly at the point of use.
Suitable for all special applications in the vacuum and compressed air sectors. Adjustable vacuum limit value and continuous vacuum monitoring.

Artikel

Aanduiding	G1 buiten	G2 binnen	G3 buiten	L (mm)	L1 (mm)	Meetbereik	Spanning
K- 07 45 01 31	G 1/8	M 5	M 8 x 1	44,0	62,0	-1 bis +10 bar	10.8 - 30 V DC