


K-MV 3/2 ELK

Solenoid valves

HANSA FLEX

Eigenschappen

Beschermingsklasse	IP65 (with connector socket fitted)
Mediumtemperatuur	-10 °C to +100 °C
Ontluchtingsaansluiting	M 5
Toepassing	Compressed air and neutral, non-toxic gases, not suitable for liquids
Werkdruk	min. 0,0 bar; max. 15,0 bar
Elektrisch gedeelte	system connection plug, 180° movement, PG7 exchangeable magnetic heads AC/DC
Nominale wijdte	1,2 mm
Omgevingstemperatuur	-10 °C to +60 °C
Behuizing	Brass
Inwendige delen	Stainless steel
Afdichtingen	FPM

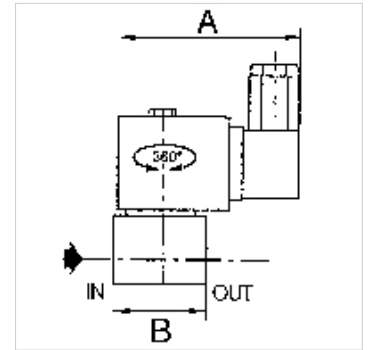

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Directly operated seat valve with spring return and manual operator. Also suitable for vacuum operation.

Artikel

Aanduiding	Schroefdraad	Spanning	A (mm)	B (mm)
K- 07 30 22 50	G 1/8	230/50 V AC, 50 Hz	58,0	33,0
K- 07 30 22 51	G 1/8	24 V DC	58,0	33,0