


# K-MV G D 230 V, 50 - 60 HZ

Normally closed, directly operated, 230 V, 50 to 60 Hz

**HANSA FLEX**

## Eigenschappen

<b>Elektrische aansluiting</b>	ISO 4400. cable socket (Pg 11P)
<b>Beschermingsklasse</b>	IP65 (with connector socket fitted)
<b>Mediumtemperatuur</b>	max. +80 °C with Perbunan-seal; max. +130 °C with FKM-Seal
<b>Schroefdraad beschrijving</b>	G-thread acc. to DIN EN ISO 228-1, Rp-thread acc. to ISO 7-1
<b>Behuizing, ventielzitting</b>	Brass
<b>Inwendige delen</b>	Stainless steel
<b>Afdichting</b>	Perbunan (NBR) or FKM

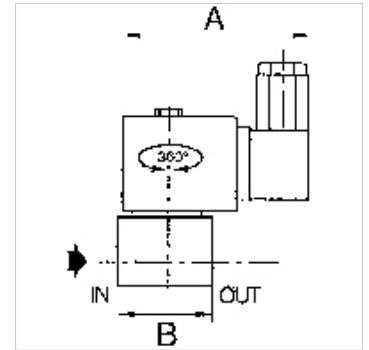

## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Standard series, proven over many years, available in three different versions: Directly operated, Combined operation, Pilot-operated. For all applications with compressed air, neutral gases or low-viscosity, neutral media.

## Artikel

Aanduiding	Schroefdraad	Max. bedrijfsdruk (bar)	NW	Afdichtmateriaal	A (mm)	B (mm)	Constructie
K- 07 30 22 35	G 1/8	12	3,2	NBR	75,0	30,0	1
K- 07 30 22 37	G 1/8	12	3,2	FKM	75,0	30,0	1
K- 07 30 22 36	G 1/4	11	3,2	NBR	75,0	40,0	2
K- 07 30 22 38	G 1/4	11	3,2	FKM	75,0	40,0	2