

K-T AG-K ISO 7-1 2

Male branch tees, conical male thread acc. to ISO 7-1



HANSA FLEX

Eigenschappen

Drukbereik Max. 60 bar

Temperatuur Max. 150 °C

Materiaal messing vernikkeld

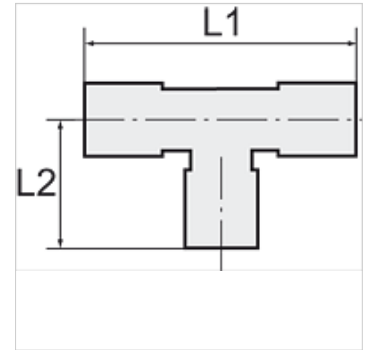

Aanwijzing

Andere gegevens op aanvraag.

Artikel

| Aanduiding | Buis-buiten-Ø | Schroefdraad | L1 (mm) | L2 (mm) | SW | SW1 (mm) |
|----------------|---------------|--------------|------------|------------|-------|-------------|
| K- 07 40 19 83 | 4 mm | R 1/8 | 44,0 | 16,0 | 9 mm | 10 |
| K- 07 40 19 84 | 6 mm | R 1/8 | 46,0 | 16,0 | 9 mm | 12 |
| K- 07 40 19 85 | 8 mm | R 1/8 | 48,0 | 17,0 | 11 mm | 14 |
| K- 07 40 19 86 | 6 mm | R 1/4 | 46,0 | 20,0 | 11 mm | 12 |
| K- 07 40 19 87 | 8 mm | R 1/4 | 48,0 | 20,0 | 11 mm | 14 |
| K- 07 40 19 88 | 10 mm | R 1/4 | 64,0 | 23,5 | 13 mm | 19 |
| K- 07 40 19 89 | 8 mm | R 3/8 | 54,0 | 24,0 | 13 mm | 14 |
| K- 07 40 19 90 | 10 mm | R 3/8 | 64,0 | 24,0 | 13 mm | 19 |
| K- 07 40 19 91 | 12 mm | R 3/8 | 69,0 | 25,5 | 15 mm | 22 |
| K- 07 40 19 92 | 12 mm | R 1/2 | 69,0 | 28,5 | 14 mm | 22 |
| K- 07 40 19 93 | 15 mm | R 1/2 | 76,0 | 30,0 | 17 mm | 27 |
| K- 07 40 19 94 | 18 mm | R 1/2 | 88,0 | 34,0 | 22 mm | 32 |