



K-XVM ZYL 2

Male connectors, parallel male thread

HANSA FLEX

Eigenschappen

max. bedrijfsdruk	18 bar
bruikbare slangen	PA, PE, PU
Materiaal	messing vernikkeld

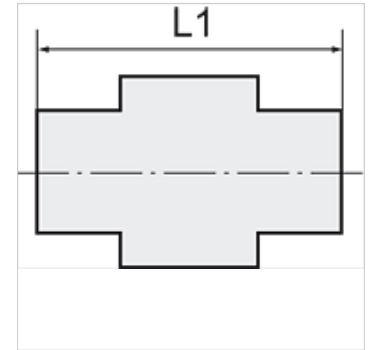

Aanwijzing

Andere gegevens op aanvraag.

Artikel

Aanduiding	Schroefdraad	voor slang	L1 (mm)	SW
K- 07 40 33 54	M 5	5 mm / 3 mm	21,0	8 mm
K- 07 40 33 55	M 5	6 mm / 4 mm	21,0	8 mm
K- 07 40 33 60	G 1/8	5 mm / 3 mm	23,0	14 mm
K- 07 40 33 61	G 1/8	6 mm / 4 mm	25,5	13 mm
K- 07 40 33 62	G 1/8	8 mm / 6 mm	25,5	14 mm
K- 07 40 33 59	G 1/8	10 mm / 8 mm	27,5	14 mm
K- 07 40 33 57	G 1/4	6 mm / 4 mm	28,0	16 mm
K- 07 40 33 58	G 1/4	8 mm / 6 mm	28,0	16 mm
K- 07 40 33 56	G 1/4	10 mm / 8 mm	29,5	16 mm
K- 07 40 33 65	G 3/8	6 mm / 4 mm	29,0	19 mm
K- 07 40 33 66	G 3/8	8 mm / 6 mm	29,0	19 mm
K- 07 40 33 63	G 3/8	10 mm / 8 mm	30,5	19 mm
K- 07 40 33 64	G 3/8	12 mm / 10 mm	32,0	19 mm