


# K-WV 3/2 ELK 230 VAC / 50HZ HANSA

3/2-way valves, electrically operated, with 230 VAC / 50 Hz solenoid

**HANSA FLEX**

## Eigenschappen

|                                    |                                                 |
|------------------------------------|-------------------------------------------------|
| Ingangsdruk                        | 2 - 10 bar                                      |
| Temperatuurgebied                  | -10 °C to +50 °C                                |
| Middelen                           | Perslucht                                       |
| Aanzetvermogen wisselspanning 50Hz | 2,2 VA                                          |
| Inschakelduur                      | ED 100 %                                        |
| Elektrische aansluiting            | Connector type C, ISO 15217, 2 poles + PE       |
| Houdvermogen wisselspanning 50Hz   | 1,6 VA                                          |
| Opgenomen vermogen DC              | 2,5 W                                           |
| Beschermingsklasse                 | IP 65                                           |
| Aansluitschroefdraad               | Material: Die-cast zinc                         |
| Behuizing                          | Material: Grivory® (PA 66)                      |
| Debietwaardemeting                 | At P2 = 6 bar, pressure drop $\Delta p = 1$ bar |

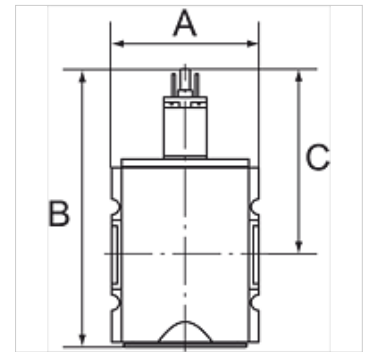

## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Pneumatic systems or parts of systems can be switched on and off by means of an electrical signal. When they are switched off, the system is exhausted at the same time.

## Bestelaanwijzingen

Valves are also available with coil 110 V AC, 50 Hz and in a pneumatically operated version. Please ask for more information.

## Artikel

| Aanduiding     | Schroefdraad | Afvoer | Debiet (L/min) | A (mm) | B        | C (mm) |
|----------------|--------------|--------|----------------|--------|----------|--------|
| K- 07 25 11 09 | G 1/4        | 1/4    | 2000           | 52,0   | 117,8 mm | 84,8   |
| K- 07 25 11 10 | G 3/8        | 1/4    | 2000           | 52,0   | 117,8 mm | 84,8   |
| K- 07 25 11 35 | G 3/8        | 1/2    | 4500           | 63,0   | 150,3 mm | 93,8   |
| K- 07 25 11 36 | G 1/2        | 1/2    | 4500           | 63,0   | 150,3 mm | 93,8   |
| K- 07 25 11 41 | G 3/4        | 1/2    | 12500          | 85,0   | 177,7 mm | 110,7  |
| K- 07 25 11 42 | G 1          | 1/2    | 12500          | 85,0   | 177,7 mm | 110,7  |

## Toebehoren

|                             |                                                                     |
|-----------------------------|---------------------------------------------------------------------|
| K-SCHALLDAE SINTERBR S      | Silencers, sintered bronze, slotted                                 |
| K-SCHALLDAE SINTERBR GE MS1 | Silencers, sintered bronze, with brass hexagon nut and brass thread |

## Reserveonderdelen

|                         |                            |
|-------------------------|----------------------------|
| K-HALTERBAUSATZ HANSA   | Holder HANSA               |
| K-VORSTEUERVENTIL HANSA | Replacement solenoid HANSA |
| K-GERAETESTECKER FORM C | Connector                  |