


# K-PRAEZI DRG DRUCKVER HANSA

Precision pressure regulators with continuous pressure supply



## Eigenschappen

|                      |   |
|----------------------|---|
| Ingangsdruk          | Max. 16 bar   |
| Temperatuurgebied    | -10 °C to +50 °C  |
| Middelen             | Perslucht   |
| Aansluitschroefdraad | Material: Die-cast zinc   |
| Behuizing            | Material: Grivory® (PA 66)  |
| Membranen            | NBR   |
| Eigen luchtverbruik  | 2.6 l/min at P2 = 6 bar (depending on secondary pressure)         |
| Debietwaardemeting   | At P1 = 10 bar, P2 = 6.3 bar and pressure drop $\Delta p = 1$ bar |

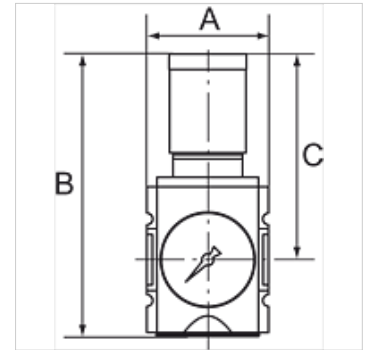

## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Precision diaphragm pressure regulators with self-relieving design and excellent flow rates in modern design for mounting side by side. By assembling two or more controllers together, it is possible to supply several working air circuits with different pressures via a single supply line.

## Bestelaanwijzingen

The price does not include a key lock. Please order separately.

## Artikel

| Aanduiding     | Schroefdraad | Regelbereik  | Debiet (L/min) | A (mm) | B        | C (mm) |
|----------------|--------------|--------------|----------------|--------|----------|--------|
| K- 07 25 09 66 | G 1/4        | 0.1 - 1 bar  | 2200           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 67 | G 1/4        | 0.1 - 2 bar  | 2200           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 68 | G 1/4        | 0.2 - 4 bar  | 2200           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 69 | G 1/4        | 0.5 - 8 bar  | 2200           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 70 | G 1/4        | 0.5 - 10 bar | 2200           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 71 | G 3/8        | 0.1 - 1 bar  | 2700           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 72 | G 3/8        | 0.1 - 2 bar  | 2700           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 73 | G 3/8        | 0.2 - 4 bar  | 2700           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 74 | G 3/8        | 0.5 - 8 bar  | 2700           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 75 | G 3/8        | 0.5 - 10 bar | 2700           | 52,0   | 128,5 mm | 95,5   |
| K- 07 25 09 76 | G 3/8        | 0.1 - 1 bar  | 4300           | 63,0   | 149,5 mm | 110,0  |
| K- 07 25 09 77 | G 3/8        | 0.1 - 2 bar  | 4300           | 63,0   | 149,5 mm | 110,0  |
| K- 07 25 09 78 | G 3/8        | 0.2 - 4 bar  | 4300           | 63,0   | 149,5 mm | 110,0  |
| K- 07 25 09 79 | G 3/8        | 0.5 - 8 bar  | 4300           | 63,0   | 149,5 mm | 110,0  |
| K- 07 25 09 80 | G 3/8        | 0.5 - 10 bar | 4300           | 63,0   | 149,5 mm | 110,0  |
| K- 07 25 09 81 | G 1/2        | 0.1 - 1 bar  | 5000           | 63,0   | 149,5 mm | 110,0  |
| K- 07 25 09 82 | G 1/2        | 0.1 - 2 bar  | 5000           | 63,0   | 149,5 mm | 110,0  |
| K- 07 25 09 83 | G 1/2        | 0.2 - 4 bar  | 5000           | 63,0   | 149,5 mm | 110,0  |
| K- 07 25 09 84 | G 1/2        | 0.5 - 8 bar  | 5000           | 63,0   | 149,5 mm | 110,0  |
| K- 07 25 09 85 | G 1/2        | 0.5 - 10 bar | 5000           | 63,0   | 149,5 mm | 110,0  |

## Toebehoren

K-STECKSCHLOSS Key lock

## Reserveonderdelen

|                           |                    |
|---------------------------|--------------------|
| K-HALTERBAUSATZ HANSA     | Holder HANSA       |
| K-SCHALTTAFELMUTTER HANSA | Nut HANSA          |
| K-DICHTSATZ HANSA         | Set of seals HANSA |