


# K-VORFIL PC-BEHLTER SCHUTZK HANSA

Pre-filters

**HANSA FLEX**

## Eigenschappen

|                      |   |
|----------------------|---|
| Ingangsdruk          | 1.5 - 16 bar                                      |
| Temperatuurgebied    | -10 °C to +50 °C                                  |
| Middelen             | Perslucht   |
| Filterfijnheid       | 0,30 µm   |
| Aansluitschroefdraad | Material: Die-cast zinc                           |
| Container            | Polycarbonate (with bayonet lock)                 |
| Filterelement        | Impregnated paper                                 |
| Behuizing            | Material: Grivory® (PA 66)                        |
| Veiligheidsmand      | Polyamide   |
| Debietwaardemeting   | At P2 = 6 bar, pressure drop $\Delta p = 0.5$ bar |

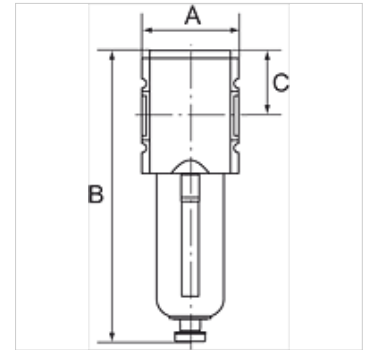

## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Pre-filters in modern design for compliance with strict compressed air purity requirements. Pre-filters are used to separate solid impurities up to 0.3 µm from compressed air and gases.

## Artikel

| Aanduiding     | Schroefdraad | Debiet (L/min) | A (mm) | B        | C (mm) | Condensaatafvoer |
|----------------|--------------|----------------|--------|----------|--------|------------------|
| K- 07 25 10 25 | G 1/4        | 500            | 52,0   | 169,5 mm | 39,5   | Semi             |
| K- 07 25 10 26 | G 3/8        | 500            | 52,0   | 169,5 mm | 39,5   | Semi             |
| K- 07 25 10 27 | G 3/8        | 750            | 63,0   | 195,0 mm | 47,8   | Semi             |
| K- 07 25 10 28 | G 1/2        | 750            | 63,0   | 195,0 mm | 47,8   | Semi             |
| K- 07 25 10 15 | G 3/4        | 2000           | 85,0   | 255,0 mm | 63,0   | Semi             |
| K- 07 25 10 16 | G 1          | 2000           | 85,0   | 255,0 mm | 63,0   | Semi             |
| K- 07 25 10 29 | G 1/4        | 500            | 52,0   | 186,5 mm | 39,5   | Auto             |
| K- 07 25 10 30 | G 3/8        | 500            | 52,0   | 186,5 mm | 39,5   | Auto             |
| K- 07 25 10 31 | G 3/8        | 750            | 63,0   | 210,5 mm | 47,8   | Auto             |
| K- 07 25 10 32 | G 1/2        | 750            | 63,0   | 210,5 mm | 47,8   | Auto             |
| K- 07 25 10 17 | G 3/4        | 2000           | 85,0   | 269,0 mm | 63,0   | Auto             |
| K- 07 25 10 18 | G 1          | 2000           | 85,0   | 269,0 mm | 63,0   | Auto             |

## Reserveonderdelen

|                              |   |
|------------------------------|---|
| K-HALTERBAUSATZ HANSA        | Holder HANSA  |
| K-ERSATZBEHAELTER HANSA POLY | Spare tank HANSA polycarbonat                         |
| K-DIFFERENZDRUCKANZEI MONO   | Differential pressure and differential pressure gauge |
| K-DIFFERENZDRUCKMANOMETER    | Differential pressure gauge                           |