# K-WTEH 2-TLG PC-BEHAEL SCHUTZK MULT


Service units, 2-piece with polycarbonate bowl and bowl guard

HANSA-FLEX

## Eigenschappen

| | |
|---|---|
| **Ingangsdruk** | Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl) |
| **Mediumtemperatuur** | max. 60 °C |
| **Omgevingstemperatuur** | Max. 60 °C |
| **Poriënwijdte in het filterelement** | 5 µm (BG 1 / BG 2), 40 µm (BG 3) |
| **Afdichtmateriaal** | NBR |
| **Veerkap** | POM-brass |
| **Behuizing** | Die-cast zinc, Aluminium for G 1 variant |
| **Druppelopzet** | PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl) |
| **Drain valve** | Semi-automatic |
| **Debietwaardemeting** | At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar |



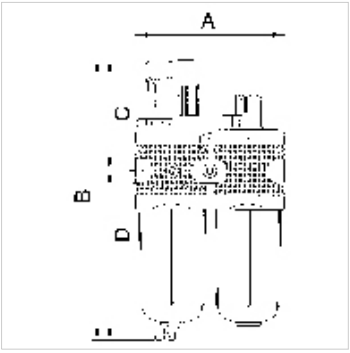


## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Two-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, combined with a centrifugal separator and a proportional lubricator.

## Bestelaanwijzingen

2-piece service units are also available in other control ranges (0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

## Extra informatie

1500 l/min: P1: 10 bar, P2: 7 bar, Δp ≤ 0.1 bar.

## Artikel

| Aanduiding | Schroefdraad | Regelbereik | Debiet (L/min) | A (mm) | B | C (mm) | D (mm) | DN | Maat |
|---|---|---|---|---|---|---|---|---|---|
| **K- 07 25 01 31** | G 1/4 | 0.5 - 10 bar | 1100 | 92,8 | 192,1 mm | 67,0 | 125,1 | 6 | 1 |
| **K- 07 25 01 34** | G 3/8 | 0.5 - 10 bar | 1100 | 92,8 | 192,1 mm | 67,0 | 125,1 | 10 | 1 |
| **K- 07 25 01 37** | G 1/2 | 0.5 - 10 bar | 3500 | 134,8 | 246,3 mm | 99,0 | 147,3 | 15 | 2 |
| **K- 07 25 01 40** | G 3/4 | 0.5 - 10 bar | 3500 | 134,8 | 246,3 mm | 99,0 | 147,3 | 20 | 2 |
| **K- 07 25 01 43** | G 1 | 0.5 - 10 bar | 10500 | 200,0 | 381,8 mm | 128,0 | 253,8 | 25 | 3 |

## Reserveonderdelen

| | |
|---|---|
| **K-HALTERBAUSATZ** | Holder |
| **K-SCHALTTAFELMUTTER** | Nut |
| **K-HALTERBAUSATZ MULTIFIX** | Holder |
| **K-KOPPELPAKET MEHR** | Coupling packet |
| **K-KOPPELPAKET SCHMA** | Coupling packet |
| **K-METALLBEHAELTER OELER MULTIFIX** | Metal tank oiler |
| **K-PC-BEHAELTER FILTER MULTIFIX** | Polycarbonate tank filter |
| **K-SCHUTZKORB G** | Protective cage |
| **K-TROPFAUFSATZ POLYCARBO 1** | Drip attachment polycarbonate |
| **K-TROPFAUFSATZ METALL** | Drip attachment metal |
| **K-FILTERELEMENT** | Filter element |
| **K-AUTOMAT ABLASSVENTIL** | Automatic drain valve |
| **K-VERSCHLEI-SATZ** | Set of wearing parts |

*Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.*