K-WTEH 3-TLG PC-BEHAEL MULTIFIX


Service units, 3-piece with polycarbonate bowl

HANSA-FLEX

Eigenschappen

Ingangsdruk	Max. 16 bar (polycarbonate bowl), Max. 20 bar (metal bowl)
Mediumtemperatuur	max. 60 °C
Omgevingstemperatuur	Max. 60 °C
Poriënwijdte in het filterelement	5 µm (BG 1 / BG 2), 40 µm (BG 3)
Afdichtmateriaal	NBR
Veerkap	POM-brass
Behuizing	Die-cast zinc, Aluminium for G 1 variant
Druppelopzet	PA (polycarbonate bowl), Zinc-glass-NBR (metal bowl)
Drain valve	Semi-automatic
Debietwaardemeting	At P1 = 8 bar, P2 = 6 bar and pressure drop Δp = 1 bar



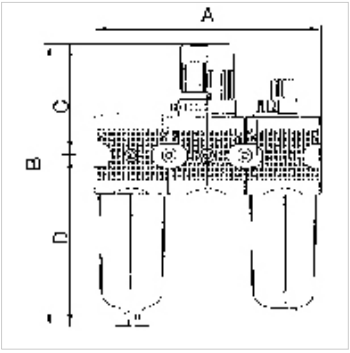

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Three-piece service units consisting of a reversible diaphragm pressure regulator, independent of inlet pressure, with self-relieving design, centrifugal separator and proportional lubricator.

Bestelaanwijzingen

3-piece service units are also available in other control ranges (0.1 - 3 bar, 0.2 - 6 bar and 0.5 - 16 bar) and in lockable version. Please ask for more information.

Extra informatie

1500 l/min: P1: 10 bar, P2: 7 bar, Δp ≤ 0.1 bar.

Artikel

Aanduiding	Schroefdraad	Regelbereik	Debiet (L/min)	A (mm)	B	C (mm)	D (mm)	DN	Maat
K- 07 25 01 10	G 1/4	0.5 - 10 bar	1100	137,8	192,1 mm	67,0	125,1	6	1
K- 07 25 01 13	G 3/8	0.5 - 10 bar	1100	137,8	192,1 mm	67,0	125,1	10	1
K- 07 25 01 16	G 1/2	0.5 - 10 bar	3000	200,8	246,3 mm	99,0	147,3	15	2
K- 07 25 01 19	G 3/4	0.5 - 10 bar	3000	200,8	246,3 mm	99,0	147,3	25	2
K- 07 25 01 22	G 1	0.5 - 10 bar	11300	300,0	381,8 mm	128,0	253,8	25	3

Reserveonderdelen

K-HALTERBAUSATZ	Holder
K-SCHALTTAFELMUTTER	Nut
K-HALTERBAUSATZ MULTIFIX	Holder
K-KOPPELPAKET MEHR	Coupling packet
K-KOPPELPAKET SCHMA	Coupling packet
K-METALLBEHAELTER OELER MULTIFIX	Metal tank oiler
K-PC-BEHAELTER FILTER MULTIFIX	Polycarbonate tank filter
K-SCHUTZKORB G	Protective cage
K-TROPFAUFSATZ POLYCARBO 1	Drip attachment polycarbonate
K-TROPFAUFSATZ METALL	Drip attachment metal
K-FILTERELEMENT	Filter element
K-AUTOMAT ABLASSVENTIL	Automatic drain valve
K-VERSCHLEI-SATZ	Set of wearing parts

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.