

K-RD GEW SCHL

Unidirectional valves, thread (input) - pipe (output)

Eigenschappen

Werkdruk	0.5 - 12 bar
Debiet 6,3bar, p=1bar	80 Nl/min (Ø 4), 320 Nl/min (Ø 6), 480 Nl/min (Ø 8)
Temperatuurgebied	-20 °C to +60 °C
Lichaam	Technopolymer
Inwendige delen	nickel-plated brass, brass, \ntechnopolymer, stainless steel
Afdichtmateriaal	NBR
Montage	Wall mounting (housing with drilled holes) Bracket mounting (mounting bracket available) Panel mounting (with bracket or lock nut)
Symbool	on the housing



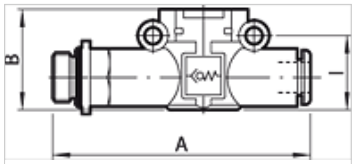

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

A carefully selected assortment of products for installation in pneumatic circuits. These small, highly efficient components allow all pneumatic functions to be implemented anywhere in the circuit. The series has an ultramodular design.
All components can be installed In parallel, In series, In a mixed parallel / serial configuration. Available as Pipe / pipe connection with two plug connectors Thread / pipe connection, with one plug connector and one nickel-plated brass thread.

Artikel

Aanduiding	Schroefdraad	voor slang-Ø (mm)	A (mm)	B (mm)	l (mm)
K- 07 15 25 34	M 5	4	47,7	17,5	12,8
K- 07 15 25 35	G 1/8	4	50,6	17,5	12,8
K- 07 15 16 59	G 1/8	6	58,3	20,0	14,6
K- 07 15 16 60	G 1/8	8	66,4	26,0	18,7
K- 07 15 16 57	G 1/4	6	61,3	20,0	14,6
K- 07 15 16 58	G 1/4	8	70,8	26,0	18,7
K- 07 15 16 61	G 3/8	8	72,4	26,0	18,7

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.