


K-MV O (NO) D 230 V, 50 HZ STA VA

Normally open, (NO), directly operated, 230 V, 50 Hz, standard type VA

HANSA FLEX

Eigenschappen

Elektrische aansluiting	device socket type A in acc. with ISO 4400 for all valves with threads G 3/8 & G 1/2, except valves type 3 & 4. Device socket
Schroefdraad beschrijving	G thread acc. DIN EN ISO 228-1
Mediumtemperatuur	max. 80 °C when using water or oils; max. 90 °C when using with air
Beschermingsklasse	IP 65
max. bedrijfsdruk	7 bar
Afdichtmateriaal	FPM
Behuizing, ventielzitting	Stainless steel 1.4301
Inwendige delen	Stainless steel

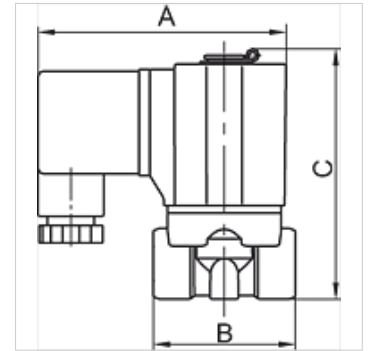

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Standard series in two different versions: Directly operated, Pilot-operated

Artikel

Aanduiding	Schroefdraad	NW	A (mm)	B (mm)	C (mm)	Constructie
K- 07 30 01 34	G 1/8	3,0	70,0	40,0	76,0	2
K- 07 30 01 35	G 1/4	3,0	70,0	40,0	76,0	2
K- 07 30 01 36	G 3/8	5,0	85,0	52,0	92,0	2
K- 07 30 01 37	G 1/2	5,0	85,0	52,0	92,0	2