# K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA FLEX

## Eigenschappen

| | |
|---|---|
| **Middelen** | Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous. |
| **Werkdruk** | 1 - 10 bar (double-acting); 2 - 10 bar (single-acting) |
| **Temperatuurgebied** | -20 °C to +80 °C |
| **Zuigerstang** | Hardened steel, thick-chromed |
| **Zuiger** | Brass (12 to 16 mm); Aluminium (20 to 100 mm) |
| **Afdichtmateriaal** | NBR |
| **Cilinderbuis** | Aluminium |



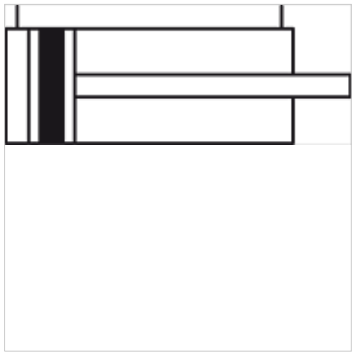

## Aanwijzing

Andere gegevens op aanvraag.

## Beschrijving

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100

## Extra informatie

Important: The scope of supply does not include a connector. Please order separately.
Other piston-Ø and stroke versions available on request.

## Artikel

| Aanduiding | Ø zuiger | Slag (mm) | Constructie | Ø zuigerstang (mm) | Schroefdraad binnen zuigerstang |
|---|---|---|---|---|---|
| **K- 07 15 12 15** | 12 mm | 5 | 1 | 6 | M 3 x 0.5 |
| **K- 07 15 12 16** | 12 mm | 10 | 1 | 6 | M 3 x 0.5 |
| **K- 07 15 12 17** | 12 mm | 20 | 1 | 6 | M 3 x 0.5 |
| **K- 07 15 12 18** | 12 mm | 25 | 1 | 6 | M 3 x 0.5 |
| **K- 07 15 12 19** | 12 mm | 30 | 1 | 6 | M 3 x 0.5 |
| **K- 07 15 12 20** | 12 mm | 35 | 1 | 6 | M 3 x 0.5 |
| **K- 07 15 12 21** | 12 mm | 40 | 1 | 6 | M 3 x 0.5 |
| **K- 07 15 12 22** | 12 mm | 45 | 1 | 6 | M 3 x 0.5 |
| **K- 07 15 12 23** | 12 mm | 50 | 1 | 6 | M 3 x 0.5 |
| **K- 07 15 12 24** | 16 mm | 5 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 25** | 16 mm | 10 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 26** | 16 mm | 20 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 27** | 16 mm | 25 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 28** | 16 mm | 30 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 29** | 16 mm | 35 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 30** | 16 mm | 40 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 31** | 16 mm | 45 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 32** | 16 mm | 50 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 33** | 16 mm | 55 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 34** | 16 mm | 60 | 1 | 8 | M 4 x 0.7 |
| **K- 07 15 12 35** | 20 mm | 5 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 36** | 20 mm | 10 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 37** | 20 mm | 20 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 38** | 20 mm | 25 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 39** | 20 mm | 30 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 40** | 20 mm | 35 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 41** | 20 mm | 40 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 42** | 20 mm | 45 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 43** | 20 mm | 50 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 44** | 20 mm | 55 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 45** | 20 mm | 60 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 46** | 20 mm | 70 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 47** | 20 mm | 75 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 48** | 20 mm | 80 | 2 | 10 | M 5 x 0.8 |
| **K- 07 15 12 49** | 25 mm | 5 | 2 | 12 | M 6 x 1 |

*Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.*

# K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA-FLEX

## Artikel

| Aanduiding | Ø zuiger | Slag (mm) | Constructie | Ø zuigerstang (mm) | Schroefdraad binnen zuigerstang |
|---|---|---|---|---|---|
| **K- 07 15 12 50** | 25 mm | 10 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 51** | 25 mm | 20 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 52** | 25 mm | 25 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 53** | 25 mm | 30 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 54** | 25 mm | 35 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 55** | 25 mm | 40 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 56** | 25 mm | 45 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 57** | 25 mm | 50 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 58** | 25 mm | 55 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 59** | 25 mm | 60 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 60** | 25 mm | 70 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 61** | 25 mm | 75 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 62** | 25 mm | 80 | 2 | 12 | M 6 x 1 |
| **K- 07 15 12 63** | 32 mm | 5 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 64** | 32 mm | 10 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 65** | 32 mm | 20 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 66** | 32 mm | 25 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 67** | 32 mm | 30 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 68** | 32 mm | 35 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 69** | 32 mm | 40 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 70** | 32 mm | 45 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 71** | 32 mm | 50 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 72** | 32 mm | 55 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 73** | 32 mm | 60 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 74** | 32 mm | 70 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 75** | 32 mm | 75 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 76** | 32 mm | 80 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 77** | 40 mm | 5 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 78** | 40 mm | 10 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 79** | 40 mm | 20 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 80** | 40 mm | 25 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 81** | 40 mm | 30 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 82** | 40 mm | 35 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 83** | 40 mm | 40 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 84** | 40 mm | 45 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 85** | 40 mm | 50 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 86** | 40 mm | 55 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 87** | 40 mm | 60 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 88** | 40 mm | 70 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 89** | 40 mm | 75 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 90** | 40 mm | 80 | 3 | 16 | M 8 x 1.25 |
| **K- 07 15 12 91** | 50 mm | 5 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 12 92** | 50 mm | 10 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 12 93** | 50 mm | 20 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 12 94** | 50 mm | 25 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 12 95** | 50 mm | 30 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 12 96** | 50 mm | 35 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 12 97** | 50 mm | 40 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 12 98** | 50 mm | 45 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 12 99** | 50 mm | 50 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 00** | 50 mm | 55 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 01** | 50 mm | 60 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 02** | 50 mm | 70 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 03** | 50 mm | 75 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 04** | 50 mm | 80 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 05** | 63 mm | 5 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 06** | 63 mm | 10 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 07** | 63 mm | 20 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 08** | 63 mm | 25 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 09** | 63 mm | 30 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 10** | 63 mm | 35 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 11** | 63 mm | 40 | 3 | 20 | M 10 x 1.5 |

*Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.*

# K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA-FLEX

## Artikel

| Aanduiding | Ø zuiger | Slag (mm) | Constructie | Ø zuigerstang (mm) | Schroefdraad binnen zuigerstang |
|---|---|---|---|---|---|
| **K- 07 15 13 12** | 63 mm | 45 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 13** | 63 mm | 50 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 14** | 63 mm | 55 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 15** | 63 mm | 60 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 16** | 63 mm | 70 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 17** | 63 mm | 75 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 18** | 63 mm | 80 | 3 | 20 | M 10 x 1.5 |
| **K- 07 15 13 19** | 80 mm | 5 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 20** | 80 mm | 10 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 21** | 80 mm | 20 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 22** | 80 mm | 25 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 23** | 80 mm | 30 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 24** | 80 mm | 35 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 25** | 80 mm | 40 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 26** | 80 mm | 45 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 27** | 80 mm | 50 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 28** | 80 mm | 55 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 29** | 80 mm | 60 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 30** | 80 mm | 70 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 31** | 80 mm | 75 | 3 | 25 | M 16 x 2 |
| **K- 07 15 13 32** | 80 mm | 80 | 3 | 25 | M 16 x 2 |
| **K- 07 15 12 01** | 100 mm | 5 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 02** | 100 mm | 10 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 03** | 100 mm | 20 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 04** | 100 mm | 25 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 05** | 100 mm | 30 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 06** | 100 mm | 35 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 07** | 100 mm | 40 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 08** | 100 mm | 45 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 09** | 100 mm | 50 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 10** | 100 mm | 55 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 11** | 100 mm | 60 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 12** | 100 mm | 70 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 13** | 100 mm | 75 | 3 | 32 | M 20 x 2.5 |
| **K- 07 15 12 14** | 100 mm | 80 | 3 | 32 | M 20 x 2.5 |

## Toebehoren

| | |
|---|---|
| **K-FUSSBEFESTIGUNG TYP LB 3** | Foot model, »LB« type |
| **K-FLANSCHBEFESTIGUNG TYP FA2** | Flange model, »FA« type |
| **K-SCHWENKGABELBEFESTIG CB 1** | Female hinge model, »CB« type |
| **K-GABELKOEPFE TYP Y SET 1** | Fork model, »Y« type (incl. threaded adapter) |
| **K-GELENKAUGEN TYP UNIT SET 1** | Rod eye model, »UNIT« type (incl. threaded adapter) |
| **K-SENSOREN CS1 KH MIT STECKER** | Sensors »CS1« type, cable with M8 plug |
| **K-SENSOREN CS1 KH OHNE STECKER** | Sensors »CS1« type, cable without plug |

*Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.*