K-KURZH ZYL DOPPELW IG ASQ


Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA FLEX

Eigenschappen

Middelen	Filtered, unlubricated or lubricated compressed air. If lubrication is used, it must be continuous.
Werkdruk	1 - 10 bar (double-acting); 2 - 10 bar (single-acting)
Temperatuurgebied	-20 °C to +80 °C
Zuigerstang	Hardened steel, thick-chromed
Zuiger	Brass (12 to 16 mm); Aluminium (20 to 100 mm)
Afdichtmateriaal	NBR
Cilinderbuis	Aluminium



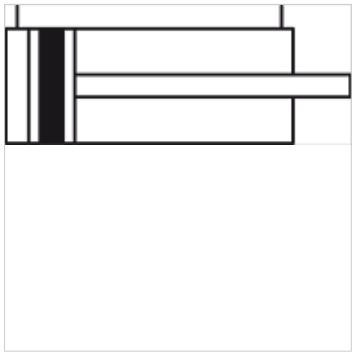

Aanwijzing

Andere gegevens op aanvraag.

Beschrijving

Specially for use where space is in short supply. Version with magnetic piston. Short-stroke cylinder in two different versions: Series "ACQ", double-acting, Ø 12 – 100

Extra informatie

Important: The scope of supply does not include a connector. Please order separately.
Other piston-Ø and stroke versions available on request.

Artikel

Aanduiding	Ø zuiger	Slag (mm)	Constructie	Ø zuigerstang (mm)	Schroefdraad binnen zuigerstang
K- 07 15 12 15	12 mm	5	1	6	M 3 x 0.5
K- 07 15 12 16	12 mm	10	1	6	M 3 x 0.5
K- 07 15 12 17	12 mm	20	1	6	M 3 x 0.5
K- 07 15 12 18	12 mm	25	1	6	M 3 x 0.5
K- 07 15 12 19	12 mm	30	1	6	M 3 x 0.5
K- 07 15 12 20	12 mm	35	1	6	M 3 x 0.5
K- 07 15 12 21	12 mm	40	1	6	M 3 x 0.5
K- 07 15 12 22	12 mm	45	1	6	M 3 x 0.5
K- 07 15 12 23	12 mm	50	1	6	M 3 x 0.5
K- 07 15 12 24	16 mm	5	1	8	M 4 x 0.7
K- 07 15 12 25	16 mm	10	1	8	M 4 x 0.7
K- 07 15 12 26	16 mm	20	1	8	M 4 x 0.7
K- 07 15 12 27	16 mm	25	1	8	M 4 x 0.7
K- 07 15 12 28	16 mm	30	1	8	M 4 x 0.7
K- 07 15 12 29	16 mm	35	1	8	M 4 x 0.7
K- 07 15 12 30	16 mm	40	1	8	M 4 x 0.7
K- 07 15 12 31	16 mm	45	1	8	M 4 x 0.7
K- 07 15 12 32	16 mm	50	1	8	M 4 x 0.7
K- 07 15 12 33	16 mm	55	1	8	M 4 x 0.7
K- 07 15 12 34	16 mm	60	1	8	M 4 x 0.7
K- 07 15 12 35	20 mm	5	2	10	M 5 x 0.8
K- 07 15 12 36	20 mm	10	2	10	M 5 x 0.8
K- 07 15 12 37	20 mm	20	2	10	M 5 x 0.8
K- 07 15 12 38	20 mm	25	2	10	M 5 x 0.8
K- 07 15 12 39	20 mm	30	2	10	M 5 x 0.8
K- 07 15 12 40	20 mm	35	2	10	M 5 x 0.8
K- 07 15 12 41	20 mm	40	2	10	M 5 x 0.8
K- 07 15 12 42	20 mm	45	2	10	M 5 x 0.8
K- 07 15 12 43	20 mm	50	2	10	M 5 x 0.8
K- 07 15 12 44	20 mm	55	2	10	M 5 x 0.8
K- 07 15 12 45	20 mm	60	2	10	M 5 x 0.8
K- 07 15 12 46	20 mm	70	2	10	M 5 x 0.8
K- 07 15 12 47	20 mm	75	2	10	M 5 x 0.8
K- 07 15 12 48	20 mm	80	2	10	M 5 x 0.8
K- 07 15 12 49	25 mm	5	2	12	M 6 x 1

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA-FLEX

Artikel

Aanduiding	Ø zuiger	Slag (mm)	Constructie	Ø zuigerstang (mm)	Schroefdraad binnen zuigerstang
K- 07 15 12 50	25 mm	10	2	12	M 6 x 1
K- 07 15 12 51	25 mm	20	2	12	M 6 x 1
K- 07 15 12 52	25 mm	25	2	12	M 6 x 1
K- 07 15 12 53	25 mm	30	2	12	M 6 x 1
K- 07 15 12 54	25 mm	35	2	12	M 6 x 1
K- 07 15 12 55	25 mm	40	2	12	M 6 x 1
K- 07 15 12 56	25 mm	45	2	12	M 6 x 1
K- 07 15 12 57	25 mm	50	2	12	M 6 x 1
K- 07 15 12 58	25 mm	55	2	12	M 6 x 1
K- 07 15 12 59	25 mm	60	2	12	M 6 x 1
K- 07 15 12 60	25 mm	70	2	12	M 6 x 1
K- 07 15 12 61	25 mm	75	2	12	M 6 x 1
K- 07 15 12 62	25 mm	80	2	12	M 6 x 1
K- 07 15 12 63	32 mm	5	3	16	M 8 x 1.25
K- 07 15 12 64	32 mm	10	3	16	M 8 x 1.25
K- 07 15 12 65	32 mm	20	3	16	M 8 x 1.25
K- 07 15 12 66	32 mm	25	3	16	M 8 x 1.25
K- 07 15 12 67	32 mm	30	3	16	M 8 x 1.25
K- 07 15 12 68	32 mm	35	3	16	M 8 x 1.25
K- 07 15 12 69	32 mm	40	3	16	M 8 x 1.25
K- 07 15 12 70	32 mm	45	3	16	M 8 x 1.25
K- 07 15 12 71	32 mm	50	3	16	M 8 x 1.25
K- 07 15 12 72	32 mm	55	3	16	M 8 x 1.25
K- 07 15 12 73	32 mm	60	3	16	M 8 x 1.25
K- 07 15 12 74	32 mm	70	3	16	M 8 x 1.25
K- 07 15 12 75	32 mm	75	3	16	M 8 x 1.25
K- 07 15 12 76	32 mm	80	3	16	M 8 x 1.25
K- 07 15 12 77	40 mm	5	3	16	M 8 x 1.25
K- 07 15 12 78	40 mm	10	3	16	M 8 x 1.25
K- 07 15 12 79	40 mm	20	3	16	M 8 x 1.25
K- 07 15 12 80	40 mm	25	3	16	M 8 x 1.25
K- 07 15 12 81	40 mm	30	3	16	M 8 x 1.25
K- 07 15 12 82	40 mm	35	3	16	M 8 x 1.25
K- 07 15 12 83	40 mm	40	3	16	M 8 x 1.25
K- 07 15 12 84	40 mm	45	3	16	M 8 x 1.25
K- 07 15 12 85	40 mm	50	3	16	M 8 x 1.25
K- 07 15 12 86	40 mm	55	3	16	M 8 x 1.25
K- 07 15 12 87	40 mm	60	3	16	M 8 x 1.25
K- 07 15 12 88	40 mm	70	3	16	M 8 x 1.25
K- 07 15 12 89	40 mm	75	3	16	M 8 x 1.25
K- 07 15 12 90	40 mm	80	3	16	M 8 x 1.25
K- 07 15 12 91	50 mm	5	3	20	M 10 x 1.5
K- 07 15 12 92	50 mm	10	3	20	M 10 x 1.5
K- 07 15 12 93	50 mm	20	3	20	M 10 x 1.5
K- 07 15 12 94	50 mm	25	3	20	M 10 x 1.5
K- 07 15 12 95	50 mm	30	3	20	M 10 x 1.5
K- 07 15 12 96	50 mm	35	3	20	M 10 x 1.5
K- 07 15 12 97	50 mm	40	3	20	M 10 x 1.5
K- 07 15 12 98	50 mm	45	3	20	M 10 x 1.5
K- 07 15 12 99	50 mm	50	3	20	M 10 x 1.5
K- 07 15 13 00	50 mm	55	3	20	M 10 x 1.5
K- 07 15 13 01	50 mm	60	3	20	M 10 x 1.5
K- 07 15 13 02	50 mm	70	3	20	M 10 x 1.5
K- 07 15 13 03	50 mm	75	3	20	M 10 x 1.5
K- 07 15 13 04	50 mm	80	3	20	M 10 x 1.5
K- 07 15 13 05	63 mm	5	3	20	M 10 x 1.5
K- 07 15 13 06	63 mm	10	3	20	M 10 x 1.5
K- 07 15 13 07	63 mm	20	3	20	M 10 x 1.5
K- 07 15 13 08	63 mm	25	3	20	M 10 x 1.5
K- 07 15 13 09	63 mm	30	3	20	M 10 x 1.5
K- 07 15 13 10	63 mm	35	3	20	M 10 x 1.5
K- 07 15 13 11	63 mm	40	3	20	M 10 x 1.5

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.

K-KURZH ZYL DOPPELW IG ASQ

Short-stroke cylinders, double-acting, with magnet, non-cushioned, with female thread, »ACQ« Series

HANSA-FLEX

Artikel

Aanduiding	Ø zuiger	Slag (mm)	Constructie	Ø zuigerstang (mm)	Schroefdraad binnen zuigerstang
K- 07 15 13 12	63 mm	45	3	20	M 10 x 1.5
K- 07 15 13 13	63 mm	50	3	20	M 10 x 1.5
K- 07 15 13 14	63 mm	55	3	20	M 10 x 1.5
K- 07 15 13 15	63 mm	60	3	20	M 10 x 1.5
K- 07 15 13 16	63 mm	70	3	20	M 10 x 1.5
K- 07 15 13 17	63 mm	75	3	20	M 10 x 1.5
K- 07 15 13 18	63 mm	80	3	20	M 10 x 1.5
K- 07 15 13 19	80 mm	5	3	25	M 16 x 2
K- 07 15 13 20	80 mm	10	3	25	M 16 x 2
K- 07 15 13 21	80 mm	20	3	25	M 16 x 2
K- 07 15 13 22	80 mm	25	3	25	M 16 x 2
K- 07 15 13 23	80 mm	30	3	25	M 16 x 2
K- 07 15 13 24	80 mm	35	3	25	M 16 x 2
K- 07 15 13 25	80 mm	40	3	25	M 16 x 2
K- 07 15 13 26	80 mm	45	3	25	M 16 x 2
K- 07 15 13 27	80 mm	50	3	25	M 16 x 2
K- 07 15 13 28	80 mm	55	3	25	M 16 x 2
K- 07 15 13 29	80 mm	60	3	25	M 16 x 2
K- 07 15 13 30	80 mm	70	3	25	M 16 x 2
K- 07 15 13 31	80 mm	75	3	25	M 16 x 2
K- 07 15 13 32	80 mm	80	3	25	M 16 x 2
K- 07 15 12 01	100 mm	5	3	32	M 20 x 2.5
K- 07 15 12 02	100 mm	10	3	32	M 20 x 2.5
K- 07 15 12 03	100 mm	20	3	32	M 20 x 2.5
K- 07 15 12 04	100 mm	25	3	32	M 20 x 2.5
K- 07 15 12 05	100 mm	30	3	32	M 20 x 2.5
K- 07 15 12 06	100 mm	35	3	32	M 20 x 2.5
K- 07 15 12 07	100 mm	40	3	32	M 20 x 2.5
K- 07 15 12 08	100 mm	45	3	32	M 20 x 2.5
K- 07 15 12 09	100 mm	50	3	32	M 20 x 2.5
K- 07 15 12 10	100 mm	55	3	32	M 20 x 2.5
K- 07 15 12 11	100 mm	60	3	32	M 20 x 2.5
K- 07 15 12 12	100 mm	70	3	32	M 20 x 2.5
K- 07 15 12 13	100 mm	75	3	32	M 20 x 2.5
K- 07 15 12 14	100 mm	80	3	32	M 20 x 2.5

Toebehoren

K-FUSSBEFESTIGUNG TYP LB 3	Foot model, »LB« type
K-FLANSCHBEFESTIGUNG TYP FA2	Flange model, »FA« type
K-SCHWENKGABELBEFESTIG CB 1	Female hinge model, »CB« type
K-GABELKOEPFE TYP Y SET 1	Fork model, »Y« type (incl. threaded adapter)
K-GELENKAUGEN TYP UNIT SET 1	Rod eye model, »UNIT« type (incl. threaded adapter)
K-SENSOREN CS1 KH MIT STECKER	Sensors »CS1« type, cable with M8 plug
K-SENSOREN CS1 KH OHNE STECKER	Sensors »CS1« type, cable without plug

Hoewel wij zeer zorgvuldig te werk gaan, kunnen wij fouten niet volledig uitsluiten en daarom niet aansprakelijkheid gesteld worden voor de vermelde gegevens.